



COMMONWEALTH OF PENNSYLVANIA
DEPARTMENT OF ENVIRONMENTAL PROTECTION
AIR QUALITY PROGRAM

TITLE V/STATE OPERATING PERMIT

Issue Date: September 30, 2019

Effective Date: September 30, 2019

Expiration Date: September 30, 2024

In accordance with the provisions of the Air Pollution Control Act, the Act of January 8, 1960, P.L. 2119, as amended, and 25 Pa. Code Chapter 127, the Owner, [and Operator if noted] (hereinafter referred to as permittee) identified below is authorized by the Department of Environmental Protection (Department) to operate the air emission source(s) more fully described in this permit. This Facility is subject to all terms and conditions specified in this permit. Nothing in this permit relieves the permittee from its obligations to comply with all applicable Federal, State and Local laws and regulations.

The regulatory or statutory authority for each permit condition is set forth in brackets. All terms and conditions in this permit are federally enforceable applicable requirements unless otherwise designated as "State-Only" or "non-applicable" requirements.

TITLE V Permit No: 56-00181

Federal Tax Id - Plant Code: 25-1249160-1

Owner Information

Name: SOUTHERN ALLEGHENIES LDFL INC
Mailing Address: 843 MILLER PICKING RD
DAVIDSVILLE, PA 15928-8917

Plant Information

Plant: SOUTHERN ALLEGHENY L/SOUTHERN ALLEGHENIES LDFL
Location: 56 Somerset County 56914 Conemaugh Township
SIC Code: 4953 Trans. & Utilities - Refuse Systems

Responsible Official

Name: ADAM FINLEY
Title: AREA DIR OF DISPOSAL
Phone: (304) 844 - 0932

Permit Contact Person

Name: JUDD PIEMME
Title: ENV. PROTECTION MANAGER
Phone: (724) 344 - 8897

[Signature] _____
MARK R. GOROG, P.E., ENVIRONMENTAL PROGRAM MANAGER, SOUTHWEST REGION



SECTION A. Table of Contents

Section A. Facility/Source Identification

Table of Contents
Site Inventory List

Section B. General Title V Requirements

- #001 Definitions
- #002 Prohibition of Air Pollution
- #003 Property Rights
- #004 Permit Expiration
- #005 Permit Renewal
- #006 Transfer of Ownership or Operational Control
- #007 Inspection and Entry
- #008 Compliance Requirements
- #009 Need to Halt or Reduce Activity Not a Defense
- #010 Duty to Provide Information
- #011 Reopening and Revising the Title V Permit for Cause
- #012 Reopening a Title V Permit for Cause by EPA
- #013 Operating Permit Application Review by the EPA
- #014 Significant Operating Permit Modifications
- #015 Minor Operating Permit Modifications
- #016 Administrative Operating Permit Amendments
- #017 Severability Clause
- #018 Fee Payment
- #019 Authorization for De Minimis Emission Increases
- #020 Reactivation of Sources
- #021 Circumvention
- #022 Submissions
- #023 Sampling, Testing and Monitoring Procedures
- #024 Recordkeeping Requirements
- #025 Reporting Requirements
- #026 Compliance Certification
- #027 Operational Flexibility
- #028 Risk Management
- #029 Approved Economic Incentives and Emission Trading Programs
- #030 Permit Shield

Section C. Site Level Title V Requirements

- C-I: Restrictions
- C-II: Testing Requirements
- C-III: Monitoring Requirements
- C-IV: Recordkeeping Requirements
- C-V: Reporting Requirements
- C-VI: Work Practice Standards
- C-VII: Additional Requirements
- C-VIII: Compliance Certification
- C-IX: Compliance Schedule

Section D. Source Level Title V Requirements

- D-I: Restrictions
- D-II: Testing Requirements
- D-III: Monitoring Requirements
- D-IV: Recordkeeping Requirements
- D-V: Reporting Requirements
- D-VI: Work Practice Standards
- D-VII: Additional Requirements



SECTION A. Table of Contents

Note: These same sub-sections are repeated for each source!

Section E. Source Group Restrictions

- E-I: Restrictions
- E-II: Testing Requirements
- E-III: Monitoring Requirements
- E-IV: Recordkeeping Requirements
- E-V: Reporting Requirements
- E-VI: Work Practice Standards
- E-VII: Additional Requirements

Section F. Alternative Operating Scenario(s)

- F-I: Restrictions
- F-II: Testing Requirements
- F-III: Monitoring Requirements
- F-IV: Recordkeeping Requirements
- F-V: Reporting Requirements
- F-VI: Work Practice Standards
- F-VII: Additional Requirements


Section G. Emission Restriction Summary

Section H. Miscellaneous



SECTION A. Site Inventory List

Source ID	Source Name	Capacity/Throughput	Fuel/Material
101	VEHICULAR TRAFFIC ON PAVED & UNPAVED RDS		
107	PAINT SPRAYING		
201	EMERGENCY GENERATORS(2)-DIESEL		
203	LANDFILL GAS		
209	LANDFILL FUGITIVE EMISSIONS (PARTICULATE)		
210	GENERATOR #3 (50 HP, NON-EMERGENCY)		
C04	WETTING OF ROADS		
C05	CANDLESTICK FLARE		
C06	LANDFILL GAS COLLECTION SYSTEM		
C07	PARNELL GAS FLARE- 3,500 CFM (NEW)		
S01	GENERATOR #1		
S03	GENERATOR #2		
S04	CANDLESTICK FLARE STACK		
S05	ENCLOSED FLARE STACK FOR C07		
S06	GENERATOR #3 STACK		
Z01	ROAD DUST		
Z02	FUGITIVE NMOC		

PERMIT MAPS



Alternative Operation:

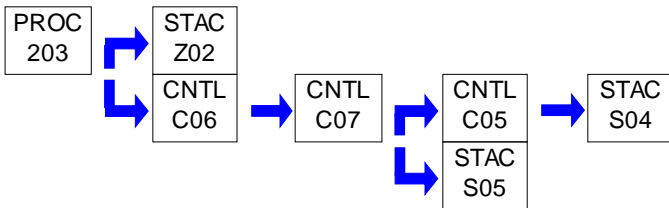

**SECTION B. General Title V Requirements****#001 [25 Pa. Code § 121.1]****Definitions**

Words and terms that are not otherwise defined in this permit shall have the meanings set forth in Section 3 of the Air Pollution Control Act (35 P.S. § 4003) and 25 Pa. Code § 121.1.

#002 [25 Pa. Code § 121.7]**Prohibition of Air Pollution**

No person may permit air pollution as that term is defined in the act.

#003 [25 Pa. Code § 127.512(c)(4)]**Property Rights**

This permit does not convey property rights of any sort, or any exclusive privileges.

#004 [25 Pa. Code § 127.446(a) and (c)]**Permit Expiration**

This operating permit is issued for a fixed term of five (5) years and shall expire on the date specified on Page 1 of this permit. The terms and conditions of the expired permit shall automatically continue pending issuance of a new Title V permit, provided the permittee has submitted a timely and complete application and paid applicable fees required under 25 Pa. Code Chapter 127, Subchapter I and the Department is unable, through no fault of the permittee, to issue or deny a new permit before the expiration of the previous permit. An application is complete if it contains sufficient information to begin processing the application, has the applicable sections completed and has been signed by a responsible official.

#005 [25 Pa. Code §§ 127.412, 127.413, 127.414, 127.446(e) & 127.503]**Permit Renewal**

(a) An application for the renewal of the Title V permit shall be submitted to the Department at least six (6) months, and not more than 18 months, before the expiration date of this permit. The renewal application is timely if a complete application is submitted to the Department's Regional Air Manager within the timeframe specified in this permit condition.

(b) The application for permit renewal shall include the current permit number, the appropriate permit renewal fee, a description of any permit revisions and off-permit changes that occurred during the permit term, and any applicable requirements that were promulgated and not incorporated into the permit during the permit term.

(c) The renewal application shall also include submission of proof that the local municipality and county, in which the facility is located, have been notified in accordance with 25 Pa. Code § 127.413. The application for renewal of the Title V permit shall also include submission of compliance review forms which have been used by the permittee to update information submitted in accordance with either 25 Pa. Code § 127.412(b) or § 127.412(j).

(d) The permittee, upon becoming aware that any relevant facts were omitted or incorrect information was submitted in the permit application, shall promptly submit such supplementary facts or corrected information during the permit renewal process. The permittee shall also promptly provide additional information as necessary to address any requirements that become applicable to the source after the date a complete renewal application was submitted but prior to release of a draft permit.

#006 [25 Pa. Code §§ 127.450(a)(4) & 127.464(a)]**Transfer of Ownership or Operational Control**

(a) In accordance with 25 Pa. Code § 127.450(a)(4), a change in ownership or operational control of the source shall be treated as an administrative amendment if:

(1) The Department determines that no other change in the permit is necessary;

(2) A written agreement has been submitted to the Department identifying the specific date of the transfer of permit responsibility, coverage and liability between the current and the new permittee; and,

(3) A compliance review form has been submitted to the Department and the permit transfer has been approved by the Department.

**SECTION B. General Title V Requirements**

(b) In accordance with 25 Pa. Code § 127.464(a), this permit may not be transferred to another person except in cases of transfer-of-ownership which are documented and approved to the satisfaction of the Department.

#007 [25 Pa. Code § 127.513, 35 P.S. § 4008 and § 114 of the CAA]**Inspection and Entry**

(a) Upon presentation of credentials and other documents as may be required by law for inspection and entry purposes, the permittee shall allow the Department of Environmental Protection or authorized representatives of the Department to perform the following:

- (1) Enter at reasonable times upon the permittee's premises where a Title V source is located or emissions related activity is conducted, or where records are kept under the conditions of this permit;
- (2) Have access to and copy or remove, at reasonable times, records that are kept under the conditions of this permit;
- (3) Inspect at reasonable times, facilities, equipment including monitoring and air pollution control equipment, practices, or operations regulated or required under this permit;
- (4) Sample or monitor, at reasonable times, substances or parameters, for the purpose of assuring compliance with the permit or applicable requirements as authorized by the Clean Air Act, the Air Pollution Control Act, or the regulations promulgated under the Acts.

(b) Pursuant to 35 P.S. § 4008, no person shall hinder, obstruct, prevent or interfere with the Department or its personnel in the performance of any duty authorized under the Air Pollution Control Act.

(c) Nothing in this permit condition shall limit the ability of the EPA to inspect or enter the premises of the permittee in accordance with Section 114 or other applicable provisions of the Clean Air Act.

#008 [25 Pa. Code §§ 127.25, 127.444, & 127.512(c)(1)]**Compliance Requirements**

(a) The permittee shall comply with the conditions of this permit. Noncompliance with this permit constitutes a violation of the Clean Air Act and the Air Pollution Control Act and is grounds for one (1) or more of the following:

- (1) Enforcement action
- (2) Permit termination, revocation and reissuance or modification
- (3) Denial of a permit renewal application

(b) A person may not cause or permit the operation of a source, which is subject to 25 Pa. Code Article III, unless the source(s) and air cleaning devices identified in the application for the plan approval and operating permit and the plan approval issued to the source are operated and maintained in accordance with specifications in the applications and the conditions in the plan approval and operating permit issued by the Department. A person may not cause or permit the operation of an air contamination source subject to 25 Pa. Code Chapter 127 in a manner inconsistent with good operating practices.

(c) For purposes of Sub-condition (b) of this permit condition, the specifications in applications for plan approvals and operating permits are the physical configurations and engineering design details which the Department determines are essential for the permittee's compliance with the applicable requirements in this Title V permit.

#009 [25 Pa. Code § 127.512(c)(2)]**Need to Halt or Reduce Activity Not a Defense**

It shall not be a defense for a permittee in an enforcement action that it would have been necessary to halt or reduce the permitted activity in order to maintain compliance with the conditions of this permit.

#010 [25 Pa. Code §§ 127.411(d) & 127.512(c)(5)]**Duty to Provide Information**

(a) The permittee shall furnish to the Department, within a reasonable time, information that the Department may request in writing to determine whether cause exists for modifying, revoking and reissuing, or terminating the permit, or

**SECTION B. General Title V Requirements**

to determine compliance with the permit.

(b) Upon request, the permittee shall also furnish to the Department copies of records that the permittee is required to keep by this permit, or for information claimed to be confidential, the permittee may furnish such records directly to the Administrator of EPA along with a claim of confidentiality.

#011 [25 Pa. Code §§ 127.463, 127.512(c)(3) & 127.542]**Reopening and Revising the Title V Permit for Cause**

(a) This Title V permit may be modified, revoked, reopened and reissued or terminated for cause. The filing of a request by the permittee for a permit modification, revocation and reissuance, or termination, or of a notification of planned changes or anticipated noncompliance does not stay a permit condition.

(b) This permit may be reopened, revised and reissued prior to expiration of the permit under one or more of the following circumstances:

(1) Additional applicable requirements under the Clean Air Act or the Air Pollution Control Act become applicable to a Title V facility with a remaining permit term of three (3) or more years prior to the expiration date of this permit. The Department will revise the permit as expeditiously as practicable but not later than 18 months after promulgation of the applicable standards or regulations. No such revision is required if the effective date of the requirement is later than the expiration date of this permit, unless the original permit or its terms and conditions has been extended.

(2) Additional requirements, including excess emissions requirements, become applicable to an affected source under the acid rain program. Upon approval by the Administrator of EPA, excess emissions offset plans for an affected source shall be incorporated into the permit.

(3) The Department or the EPA determines that this permit contains a material mistake or inaccurate statements were made in establishing the emissions standards or other terms or conditions of this permit.

(4) The Department or the Administrator of EPA determines that the permit must be revised or revoked to assure compliance with the applicable requirements.

(c) Proceedings to revise this permit shall follow the same procedures which apply to initial permit issuance and shall affect only those parts of this permit for which cause to revise exists. The revision shall be made as expeditiously as practicable.

(d) Regardless of whether a revision is made in accordance with (b)(1) above, the permittee shall meet the applicable standards or regulations promulgated under the Clean Air Act within the time frame required by standards or regulations.

#012 [25 Pa. Code § 127.543]**Reopening a Title V Permit for Cause by EPA**

As required by the Clean Air Act and regulations adopted thereunder, this permit may be modified, reopened and reissued, revoked or terminated for cause by EPA in accordance with procedures specified in 25 Pa. Code § 127.543.

#013 [25 Pa. Code § 127.522(a)]**Operating Permit Application Review by the EPA**

The applicant may be required by the Department to provide a copy of the permit application, including the compliance plan, directly to the Administrator of the EPA. Copies of title V permit applications to EPA, pursuant to 25 PA Code §127.522(a), shall be submitted, if required, to the following EPA e-mail box:

R3_Air_Apps_and_Notices@epa.gov

Please place the following in the subject line: TV [permit number], [Facility Name].

#014 [25 Pa. Code § 127.541]**Significant Operating Permit Modifications**

When permit modifications during the term of this permit do not qualify as minor permit modifications or administrative amendments, the permittee shall submit an application for significant Title V permit modifications in accordance with

**SECTION B. General Title V Requirements**

25 Pa. Code § 127.541. Notifications to EPA, pursuant to 25 PA Code §127.522(a), if required, shall be submitted, to the following EPA e-mail box:

R3_Air_Apps_and_Notices@epa.gov

Please place the following in the subject line: TV [permit number], [Facility Name].

#015 [25 Pa. Code §§ 121.1 & 127.462]**Minor Operating Permit Modifications**

The permittee may make minor operating permit modifications (as defined in 25 Pa. Code §121.1), on an expedited basis, in accordance with 25 Pa. Code §127.462 (relating to minor operating permit modifications). Notifications to EPA, pursuant to 25 PA Code §127.462(c), if required, shall be submitted, to the following EPA e-mail box:

R3_Air_Apps_and_Notices@epa.gov

Please place the following in the subject line: TV [permit number], [Facility Name].

#016 [25 Pa. Code § 127.450]**Administrative Operating Permit Amendments**

(a) The permittee may request administrative operating permit amendments, as defined in 25 Pa. Code §127.450(a). Copies of request for administrative permit amendment to EPA, pursuant to 25 PA Code §127.450(c)(1), if required, shall be submitted to the following EPA e-mail box:

R3_Air_Apps_and_Notices@epa.gov

Please place the following in the subject line: TV [permit number], [Facility Name].

(b) Upon final action by the Department granting a request for an administrative operating permit amendment covered under §127.450(a)(5), the permit shield provisions in 25 Pa. Code § 127.516 (relating to permit shield) shall apply to administrative permit amendments incorporated in this Title V Permit in accordance with §127.450(c), unless precluded by the Clean Air Act or the regulations thereunder.

#017 [25 Pa. Code § 127.512(b)]**Severability Clause**

The provisions of this permit are severable, and if any provision of this permit is determined by the Environmental Hearing Board or a court of competent jurisdiction, or US EPA to be invalid or unenforceable, such a determination will not affect the remaining provisions of this permit.

#018 [25 Pa. Code §§ 127.704, 127.705 & 127.707]**Fee Payment**

(a) The permittee shall pay fees to the Department in accordance with the applicable fee schedules in 25 Pa. Code Chapter 127, Subchapter I (relating to plan approval and operating permit fees).

(b) Emission Fees. The permittee shall, on or before September 1st of each year, pay applicable annual Title V emission fees for emissions occurring in the previous calendar year as specified in 25 Pa. Code § 127.705. The permittee is not required to pay an emission fee for emissions of more than 4,000 tons of each regulated pollutant emitted from the facility.

(c) As used in this permit condition, the term "regulated pollutant" is defined as a VOC, each pollutant regulated under Sections 111 and 112 of the Clean Air Act and each pollutant for which a National Ambient Air Quality Standard has been promulgated, except that carbon monoxide is excluded.

(d) Late Payment. Late payment of emission fees will subject the permittee to the penalties prescribed in 25 Pa. Code § 127.707 and may result in the suspension or termination of the Title V permit. The permittee shall pay a penalty of fifty percent (50%) of the fee amount, plus interest on the fee amount computed in accordance with 26 U.S.C.A. § 6621(a)(2) from the date the emission fee should have been paid in accordance with the time frame specified in 25 Pa. Code § 127.705(c).

**SECTION B. General Title V Requirements**

(e) The permittee shall pay an annual operating permit administration fee according to the fee schedule established in 25 Pa. Code § 127.704(c) if the facility, identified in Subparagraph (iv) of the definition of the term "Title V facility" in 25 Pa. Code § 121.1, is subject to Title V after the EPA Administrator completes a rulemaking requiring regulation of those sources under Title V of the Clean Air Act.

(f) This permit condition does not apply to a Title V facility which qualifies for exemption from emission fees under 35 P.S. § 4006.3(f).

#019 [25 Pa. Code §§ 127.14(b) & 127.449]**Authorization for De Minimis Emission Increases**

(a) This permit authorizes de minimis emission increases from a new or existing source in accordance with 25 Pa. Code §§ 127.14 and 127.449 without the need for a plan approval or prior issuance of a permit modification. The permittee shall provide the Department with seven (7) days prior written notice before commencing any de minimis emissions increase that would result from either: (1) a physical change of minor significance under § 127.14(c)(1); or (2) the construction, installation, modification or reactivation of an air contamination source. The written notice shall:

- (1) Identify and describe the pollutants that will be emitted as a result of the de minimis emissions increase.
- (2) Provide emission rates expressed in tons per year and in terms necessary to establish compliance consistent with any applicable requirement.

The Department may disapprove or condition de minimis emission increases at any time.

(b) Except as provided below in (c) and (d) of this permit condition, the permittee is authorized during the term of this permit to make de minimis emission increases (expressed in tons per year) up to the following amounts without the need for a plan approval or prior issuance of a permit modification:

- (1) Four tons of carbon monoxide from a single source during the term of the permit and 20 tons of carbon monoxide at the facility during the term of the permit.
- (2) One ton of NO_x from a single source during the term of the permit and 5 tons of NO_x at the facility during the term of the permit.
- (3) One and six-tenths tons of the oxides of sulfur from a single source during the term of the permit and 8.0 tons of oxides of sulfur at the facility during the term of the permit.
- (4) Six-tenths of a ton of PM₁₀ from a single source during the term of the permit and 3.0 tons of PM₁₀ at the facility during the term of the permit. This shall include emissions of a pollutant regulated under Section 112 of the Clean Air Act unless precluded by the Clean Air Act or 25 Pa. Code Article III.
- (5) One ton of VOCs from a single source during the term of the permit and 5.0 tons of VOCs at the facility during the term of the permit. This shall include emissions of a pollutant regulated under Section 112 of the Clean Air Act unless precluded by the Clean Air Act or 25 Pa. Code Article III.

(c) In accordance with § 127.14, the permittee may install the following minor sources without the need for a plan approval:

- (1) Air conditioning or ventilation systems not designed to remove pollutants generated or released from other sources.
- (2) Combustion units rated at 2,500,000 or less Btu per hour of heat input.
- (3) Combustion units with a rated capacity of less than 10,000,000 Btu per hour heat input fueled by natural gas supplied by a public utility, liquefied petroleum gas or by commercial fuel oils which are No. 2 or lighter, viscosity less than or equal to 5.82 c St, and which meet the sulfur content requirements of 25 Pa. Code § 123.22 (relating to combustion units). For purposes of this permit, commercial fuel oil shall be virgin oil which has no reprocessed, recycled or waste material added.
- (4) Space heaters which heat by direct heat transfer.

**SECTION B. General Title V Requirements**

(5) Laboratory equipment used exclusively for chemical or physical analysis.

(6) Other sources and classes of sources determined to be of minor significance by the Department.

(d) This permit does not authorize de minimis emission increases if the emissions increase would cause one or more of the following:

(1) Increase the emissions of a pollutant regulated under Section 112 of the Clean Air Act except as authorized in Subparagraphs (b)(4) and (5) of this permit condition.

(2) Subject the facility to the prevention of significant deterioration requirements in 25 Pa. Code Chapter 127, Subchapter D and/or the new source review requirements in Subchapter E.

(3) Violate any applicable requirement of the Air Pollution Control Act, the Clean Air Act, or the regulations promulgated under either of the acts.

(4) Changes which are modifications under any provision of Title I of the Clean Air Act and emission increases which would exceed the allowable emissions level (expressed as a rate of emissions or in terms of total emissions) under the Title V permit.

(e) Unless precluded by the Clean Air Act or the regulations thereunder, the permit shield described in 25 Pa. Code § 127.516 (relating to permit shield) shall extend to the changes made under 25 Pa. Code § 127.449 (relating to de minimis emission increases).

(f) Emissions authorized under this permit condition shall be included in the monitoring, recordkeeping and reporting requirements of this permit.

(g) Except for de minimis emission increases allowed under this permit, 25 Pa. Code § 127.449, or sources and physical changes meeting the requirements of 25 Pa. Code § 127.14, the permittee is prohibited from making physical changes or engaging in activities that are not specifically authorized under this permit without first applying for a plan approval. In accordance with § 127.14(b), a plan approval is not required for the construction, modification, reactivation, or installation of the sources creating the de minimis emissions increase.

(h) The permittee may not meet de minimis emission threshold levels by offsetting emission increases or decreases at the same source.

#020 [25 Pa. Code §§ 127.11a & 127.215]**Reactivation of Sources**

(a) The permittee may reactivate a source at the facility that has been out of operation or production for at least one year, but less than or equal to five (5) years, if the source is reactivated in accordance with the requirements of 25 Pa. Code §§ 127.11a and 127.215. The reactivated source will not be considered a new source.

(b) A source which has been out of operation or production for more than five (5) years but less than 10 years may be reactivated and will not be considered a new source if the permittee satisfies the conditions specified in 25 Pa. Code § 127.11a(b).

#021 [25 Pa. Code §§ 121.9 & 127.216]**Circumvention**

(a) The owner of this Title V facility, or any other person, may not circumvent the new source review requirements of 25 Pa. Code Chapter 127, Subchapter E by causing or allowing a pattern of ownership or development, including the phasing, staging, delaying or engaging in incremental construction, over a geographic area of a facility which, except for the pattern of ownership or development, would otherwise require a permit or submission of a plan approval application.

(b) No person may permit the use of a device, stack height which exceeds good engineering practice stack height, dispersion technique or other technique which, without resulting in reduction of the total amount of air contaminants emitted, conceals or dilutes an emission of air contaminants which would otherwise be in violation of this permit, the Air Pollution Control Act or the regulations promulgated thereunder, except that with prior approval of the Department,

**SECTION B. General Title V Requirements**

the device or technique may be used for control of malodors.

#022 [25 Pa. Code §§ 127.402(d) & 127.513(1)]**Submissions**

(a) Reports, test data, monitoring data, notifications and requests for renewal of the permit shall be submitted to the:

Regional Air Program Manager
PA Department of Environmental Protection
(At the address given on the permit transmittal letter,
or otherwise notified)

(b) Any report or notification for the EPA Administrator or EPA Region III should be addressed to:

Office of Air Enforcement and Compliance Assistance (3AP20)
United States Environmental Protection Agency
Region 3
1650 Arch Street
Philadelphia, PA 19103-2029

(c) An application, form, report or compliance certification submitted pursuant to this permit condition shall contain certification by a responsible official as to truth, accuracy, and completeness as required under 25 Pa. Code § 127.402(d). Unless otherwise required by the Clean Air Act or regulations adopted thereunder, this certification and any other certification required pursuant to this permit shall state that, based on information and belief formed after reasonable inquiry, the statements and information in the document are true, accurate and complete.

#023 [25 Pa. Code §§ 127.441(c) & 127.463(e); Chapter 139; & 114(a)(3), 504(b) of the CAA]**Sampling, Testing and Monitoring Procedures**

(a) The permittee shall perform the emissions monitoring and analysis procedures or test methods for applicable requirements of this Title V permit. In addition to the sampling, testing and monitoring procedures specified in this permit, the Permittee shall comply with any additional applicable requirements promulgated under the Clean Air Act after permit issuance regardless of whether the permit is revised.

(b) The sampling, testing and monitoring required under the applicable requirements of this permit, shall be conducted in accordance with the requirements of 25 Pa. Code Chapter 139 unless alternative methodology is required by the Clean Air Act (including §§ 114(a)(3) and 504(b)) and regulations adopted thereunder.

#024 [25 Pa. Code §§ 127.511 & Chapter 135]**Recordkeeping Requirements**

(a) The permittee shall maintain and make available, upon request by the Department, records of required monitoring information that include the following:

- (1) The date, place (as defined in the permit) and time of sampling or measurements.
- (2) The dates the analyses were performed.
- (3) The company or entity that performed the analyses.
- (4) The analytical techniques or methods used.
- (5) The results of the analyses.
- (6) The operating conditions as existing at the time of sampling or measurement.

(b) The permittee shall retain records of the required monitoring data and supporting information for at least five (5) years from the date of the monitoring sample, measurement, report or application. Supporting information includes the calibration data and maintenance records and original strip-chart recordings for continuous monitoring instrumentation, and copies of reports required by the permit.

**SECTION B. General Title V Requirements**

(c) The permittee shall maintain and make available to the Department upon request, records including computerized records that may be necessary to comply with the reporting, recordkeeping and emission statement requirements in 25 Pa. Code Chapter 135 (relating to reporting of sources). In accordance with 25 Pa. Code Chapter 135, § 135.5, such records may include records of production, fuel usage, maintenance of production or pollution control equipment or other information determined by the Department to be necessary for identification and quantification of potential and actual air contaminant emissions. If direct recordkeeping is not possible or practical, sufficient records shall be kept to provide the needed information by indirect means.

#025 [25 Pa. Code §§ 127.411(d), 127.442, 127.463(e) & 127.511(c)]**Reporting Requirements**

(a) The permittee shall comply with the reporting requirements for the applicable requirements specified in this Title V permit. In addition to the reporting requirements specified herein, the permittee shall comply with any additional applicable reporting requirements promulgated under the Clean Air Act after permit issuance regardless of whether the permit is revised.

(b) Pursuant to 25 Pa. Code § 127.511(c), the permittee shall submit reports of required monitoring at least every six (6) months unless otherwise specified in this permit. Instances of deviations (as defined in 25 Pa. Code § 121.1) from permit requirements shall be clearly identified in the reports. The reporting of deviations shall include the probable cause of the deviations and corrective actions or preventative measures taken, except that sources with continuous emission monitoring systems shall report according to the protocol established and approved by the Department for the source. The required reports shall be certified by a responsible official.

(c) Every report submitted to the Department under this permit condition shall comply with the submission procedures specified in Section B, Condition #022(c) of this permit.

(d) Any records, reports or information obtained by the Department or referred to in a public hearing shall be made available to the public by the Department except for such records, reports or information for which the permittee has shown cause that the documents should be considered confidential and protected from disclosure to the public under Section 4013.2 of the Air Pollution Control Act and consistent with Sections 112(d) and 114(c) of the Clean Air Act and 25 Pa. Code § 127.411(d). The permittee may not request a claim of confidentiality for any emissions data generated for the Title V facility.

#026 [25 Pa. Code § 127.513]**Compliance Certification**

(a) One year after the date of issuance of the Title V permit, and each year thereafter, unless specified elsewhere in the permit, the permittee shall submit to the Department and EPA Region III a certificate of compliance with the terms and conditions in this permit, for the previous year, including the emission limitations, standards or work practices. This certification shall include:

- (1) The identification of each term or condition of the permit that is the basis of the certification.
- (2) The compliance status.
- (3) The methods used for determining the compliance status of the source, currently and over the reporting period.
- (4) Whether compliance was continuous or intermittent.

(b) The compliance certification shall be postmarked or hand-delivered no later than thirty days after each anniversary of the date of issuance of this Title V Operating Permit, or on the submittal date specified elsewhere in the permit, to the Department and EPA in accordance with the submission requirements specified in condition #022 of this section.

#027 [25 Pa. Code § 127.3]**Operational Flexibility**

The permittee is authorized to make changes within the Title V facility in accordance with the following provisions in 25 Pa. Code Chapter 127 which implement the operational flexibility requirements of Section 502(b)(10) of the Clean Air Act and Section 6.1(i) of the Air Pollution Control Act:

- (1) Section 127.14 (relating to exemptions)

**SECTION B. General Title V Requirements**

- (2) Section 127.447 (relating to alternative operating scenarios)
- (3) Section 127.448 (relating to emissions trading at facilities with federally enforceable emissions caps)
- (4) Section 127.449 (relating to de minimis emission increases)
- (5) Section 127.450 (relating to administrative operating permit amendments)
- (6) Section 127.462 (relating to minor operating permit amendments)
- (7) Subchapter H (relating to general plan approvals and operating permits)

#028 [25 Pa. Code §§ 127.441(d), 127.512(i) and 40 CFR Part 68]**Risk Management**

(a) If required by Section 112(r) of the Clean Air Act, the permittee shall develop and implement an accidental release program consistent with requirements of the Clean Air Act, 40 CFR Part 68 (relating to chemical accident prevention provisions) and the Federal Chemical Safety Information, Site Security and Fuels Regulatory Relief Act (P.L. 106-40).

(b) The permittee shall prepare and implement a Risk Management Plan (RMP) which meets the requirements of Section 112(r) of the Clean Air Act, 40 CFR Part 68 and the Federal Chemical Safety Information, Site Security and Fuels Regulatory Relief Act when a regulated substance listed in 40 CFR § 68.130 is present in a process in more than the listed threshold quantity at the Title V facility. The permittee shall submit the RMP to the federal Environmental Protection Agency according to the following schedule and requirements:

(1) The permittee shall submit the first RMP to a central point specified by EPA no later than the latest of the following:

- (i) Three years after the date on which a regulated substance is first listed under § 68.130; or,
- (ii) The date on which a regulated substance is first present above a threshold quantity in a process.

(2) The permittee shall submit any additional relevant information requested by the Department or EPA concerning the RMP and shall make subsequent submissions of RMPs in accordance with 40 CFR § 68.190.

(3) The permittee shall certify that the RMP is accurate and complete in accordance with the requirements of 40 CFR Part 68, including a checklist addressing the required elements of a complete RMP.

(c) As used in this permit condition, the term "process" shall be as defined in 40 CFR § 68.3. The term "process" means any activity involving a regulated substance including any use, storage, manufacturing, handling, or on-site movement of such substances or any combination of these activities. For purposes of this definition, any group of vessels that are interconnected, or separate vessels that are located such that a regulated substance could be involved in a potential release, shall be considered a single process.

(d) If the Title V facility is subject to 40 CFR Part 68, as part of the certification required under this permit, the permittee shall:

(1) Submit a compliance schedule for satisfying the requirements of 40 CFR Part 68 by the date specified in 40 CFR § 68.10(a); or,

(2) Certify that the Title V facility is in compliance with all requirements of 40 CFR Part 68 including the registration and submission of the RMP.

(e) If the Title V facility is subject to 40 CFR Part 68, the permittee shall maintain records supporting the implementation of an accidental release program for five (5) years in accordance with 40 CFR § 68.200.

(f) When the Title V facility is subject to the accidental release program requirements of Section 112(r) of the Clean Air Act and 40 CFR Part 68, appropriate enforcement action will be taken by the Department if:

- (1) The permittee fails to register and submit the RMP or a revised plan pursuant to 40 CFR Part 68.

**SECTION B. General Title V Requirements**

(2) The permittee fails to submit a compliance schedule or include a statement in the compliance certification required under Condition #26 of Section B of this Title V permit that the Title V facility is in compliance with the requirements of Section 112(r) of the Clean Air Act, 40 CFR Part 68, and 25 Pa. Code § 127.512(i).

#029 [25 Pa. Code § 127.512(e)]**Approved Economic Incentives and Emission Trading Programs**

No permit revision shall be required under approved economic incentives, marketable permits, emissions trading and other similar programs or processes for changes that are provided for in this Title V permit.

#030 [25 Pa. Code §§ 127.516, 127.450(d), 127.449(f) & 127.462(g)]**Permit Shield**

(a) The permittee's compliance with the conditions of this permit shall be deemed in compliance with applicable requirements (as defined in 25 Pa. Code § 121.1) as of the date of permit issuance if either of the following applies:

(1) The applicable requirements are included and are specifically identified in this permit.

(2) The Department specifically identifies in the permit other requirements that are not applicable to the permitted facility or source.

(b) Nothing in 25 Pa. Code § 127.516 or the Title V permit shall alter or affect the following:

(1) The provisions of Section 303 of the Clean Air Act, including the authority of the Administrator of the EPA provided thereunder.

(2) The liability of the permittee for a violation of an applicable requirement prior to the time of permit issuance.

(3) The applicable requirements of the acid rain program, consistent with Section 408(a) of the Clean Air Act.

(4) The ability of the EPA to obtain information from the permittee under Section 114 of the Clean Air Act.

(c) Unless precluded by the Clean Air Act or regulations thereunder, final action by the Department incorporating a significant permit modification in this Title V Permit shall be covered by the permit shield at the time that the permit containing the significant modification is issued.

**SECTION C. Site Level Requirements****I. RESTRICTIONS.****Emission Restriction(s).****# 001 [25 Pa. Code §121.7]****Prohibition of air pollution.**

No person may permit air pollution as that term is defined in the act.

002 [25 Pa. Code §123.1]**Prohibition of certain fugitive emissions**

(a) No person may permit the emission into the outdoor atmosphere of fugitive air contaminant from a source other than the following:

(1) Construction or demolition of buildings or structures.

(2) Grading, paving and maintenance of roads and streets.

(3) Use of roads and streets. Emissions from material in or on trucks, railroad cars and other vehicular equipment are not considered as emissions from use of roads and streets.

(4) Clearing of land.

(5) Stockpiling of materials.

(6) Open burning operations.

(7) Blasting in open pit mines. Emissions from drilling are not considered as emissions from blasting.

(8) Coke oven batteries, provided the fugitive air contaminants emitted from any coke oven battery comply with the standards for visible fugitive emissions in

(9) Sources and classes of sources other than those identified in paragraphs (1)-(8), for which the operator has obtained a determination from the Department that fugitive emissions from the source, after appropriate control, meet the following requirements:

(i) the emissions are of minor significance with respect to causing air pollution; and

(ii) the emissions are not preventing or interfering with the attainment or maintenance of any ambient air quality standard.

003 [25 Pa. Code §123.2]**Fugitive particulate matter**

A person may not permit fugitive particulate matter to be emitted into the outdoor atmosphere from a source specified in 123.1(a)(1) -- (9) (relating to prohibition of certain fugitive emissions) if such emissions are visible at the point the emissions pass outside the person's property.

004 [25 Pa. Code §123.31]**Limitations**

A person may not permit the emission into the outdoor atmosphere of any malodorous air contaminants from any source in such a manner that the malodors are detectable outside the property of the person on whose land the source is being operated.

005 [25 Pa. Code §123.41]**Limitations**

The owner/operator may not permit the emission into the outdoor atmosphere of visible air contaminants in such a manner that the opacity of the emission is either of the following:

(1) Equal to or greater than 20% for a period or periods aggregating more than three minutes in any 1 hour.

(2) Equal to or greater than 60% at any time.

**SECTION C. Site Level Requirements****# 006 [25 Pa. Code §123.42]****Exceptions**

The visible emission limitations of 25 PA Code Section 123.41 do not apply when:

- (a) The presence of uncombined water is the only reason for failure of the emission to meet the limitations.
- (b) The emission results from the operation of equipment used solely to train and test persons in observing the opacity of visible emissions.
- (c) The emission results from sources specified in 25 PA Code Section 123.1(a)(1) -- (9) (relating to prohibition of certain fugitive emissions).

007 [25 Pa. Code §127.402]**General provisions.**

- (a) A person may not operate a stationary air contamination source unless the Department has issued to the person a permit to operate the source under this article in response to a written application for a permit submitted on forms and containing the information the Department may prescribe.
- (b) The Department will provide public notice and the right to comment on each permit prior to issuance or denial and may hold public hearings concerning a permit.
- (c) A permit may be issued to an applicant for a stationary air contamination source requiring construction, assembly, installation, reactivation or modification when the requirements of this article related to operating requirements have been met and there has been performed upon the source a test or evaluation which satisfies the Department that the air contamination source will not discharge into the outdoor atmosphere an air contaminant at a rate in excess of that permitted by applicable regulations under this article, or in violation of a performance or emission standard or other requirements established by the EPA or the Department for the source, and will not cause air pollution.
- (d) An application, form, report or compliance certification submitted under this subchapter shall contain certification by a responsible official as to truth, accuracy and completeness. This certification and other certification required under this subchapter shall state that, based on information and belief formed after reasonable inquiry, the statements and information in the document are true, accurate and complete.

008 [25 Pa. Code §127.441]**Operating permit terms and conditions.**

Compliance with the emission limitations contained herein shall be demonstrated using stack test results, operating parameters, vendor guarantees, AP-42 emission factors, material balance calculations, and other methods that are approved by the Department.

009 [25 Pa. Code §127.444]**Compliance requirements.**

A person may not cause or permit the operation of a source subject to this article unless the source and air cleaning devices identified in the application for the plan approval and operating permit and the plan approval issued to the source are operated and maintained in accordance with specifications in the application and conditions in the plan approval and operating permit issued by the Department. A person may not cause or permit the operation of an air contamination source subject to this chapter in a manner inconsistent with good operating practices.

010 [25 Pa. Code §127.511]**Monitoring and related recordkeeping and reporting requirements.**

Owner/operator shall submit the semi-annual monitoring reports for this facility by January 31 and July 31 of each year. The January 31 semi-annual monitoring report shall cover the period from July 1 through December 31. This semi-annual monitoring report may be included in January 31 Title V Compliance Certification required by Title 25 PA Code § 127.513. The July 31 semi-annual monitoring report shall cover the period from January 1 through June 30. However, in accordance with Title 25 PA Code § 127.511(c), in no case shall the semi-annual monitoring report be submitted less often than every six (6) months. This may require that an interim semi-annual monitoring report (covering a period less than six (6) months) be submitted to bring the facility into compliance with this schedule.

**SECTION C. Site Level Requirements****# 011 [25 Pa. Code §129.14]****Open burning operations**

- (a) No person may permit the open burning of material in such a manner that:
- (1) The emissions are visible, at any time, at the point such emissions pass outside the property of the person on whose land the open burning is being conducted.
 - (2) Malodorous air contaminants from the open burning are detectable outside the property of the person on whose land the open burning is being conducted.
 - (3) The emissions interfere with the reasonable enjoyment of life or property.
 - (4) The emissions cause damage to vegetation or property.
 - (5) The emissions are or may be deleterious to human or animal health.
- (b) Exceptions: The requirements of (1) through (5) do not apply where the open burning operations result from:
- (1) A fire set to prevent or abate a fire hazard, when approved by the Department and set by or under the supervision of a public officer.
 - (2) A fire set for the purpose of instructing personnel in fire fighting, when approved by the Department.
 - (3) A fire set for the prevention and control of disease or pests, when approved by the Department.
 - (4) A fire set solely for recreational or ceremonial purposes.
 - (5) A fire set solely for cooking food.
- (c) The following is applicable to clearing and grubbing wastes:
- (1) As used in this subsection the following terms shall have the following meanings:

Air curtain destructor -- A mechanical device which forcefully projects a curtain of air across a pit in which open burning is being conducted so that combustion efficiency is increased and smoke and other particulate matter are contained.
 Clearing and grubbing wastes -- Trees, shrubs, and other native vegetation which are cleared from land during or prior to the process of construction. The term does not include demolition wastes and dirt laden roots.

- (2) Clearing and grubbing wastes may be burned subject to the following requirements:
 - (i) Upon receipt of a complaint or determination by the Department that an air pollution problem exists, the Department may order that the open burning cease or comply with subsection (b) of this section.
 - (ii) Authorization for open burning under this paragraph does not apply to clearing and grubbing wastes that have been transported.

012 [40 CFR Part 60 Standards of Performance for New Stationary Sources §40 CFR 60.755]**Subpart WWW--Standards of Performance for Municipal Solid Waste Landfills****Compliance provisions.**

(a) Except as provided in 60.752(b)(2)(i)(B), the specified methods in paragraphs (a)(1) through (a)(6) of this section shall be used to determine whether the gas collection system is in compliance with 60.752(b)(2)(ii).**

(1) For the purposes of calculating the maximum expected gas generation flow rate from the landfill to determine compliance with 60.752(b)(2)(ii)(A) (1), one of the following equations shall be used. The k and Lo kinetic factors should be those published in the most recent Compilation of Air Pollutant Emission Factors (AP-42) or other site specific values demonstrated to be appropriate and approved by the Administrator. If k has been determined as specified in 60.754(a)(4), the value of k determined from the test shall be used. A value of no more than 15 years shall be used for the intended use period of the gas mover equipment. The active life of the landfill is the age of the landfill plus the estimated number of years until closure.

- (i) For sites with unknown year-to-year solid waste acceptance rate:

$$Q_m = 2L_o R (e^{-kc} - e^{-kt})$$

where,

Q_m = maximum expected gas generation flow rate, cubic meters per year

L_o = methane generation potential, cubic meters per megagram solid waste

SECTION C. Site Level Requirements

R = average annual acceptance rate, megagrams per year

k = methane generation rate constant, year⁻¹

t = age of the landfill at equipment installation plus the time the owner or operator intends to use the gas mover equipment or active life of the landfill, whichever is less. If the equipment is installed after closure, t is the age of the landfill at installation, years

c = time since closure, years (for an active landfill c = 0 and e^[-kc] = 1)

(ii) For sites with known year-to-year solid waste acceptance rate:

$$QM = 2kLoMi(e^{-kt_i})$$

where,

QM = maximum expected gas generation flow rate, cubic meters per year

k = methane generation rate constant, year⁻¹

Lo = methane generation potential, cubic meters per megagram solid waste

Mi = mass of solid waste in the ith section, megagrams

t_i = age of the ith section, years

(iii) If a collection and control system has been installed, actual flow data may be used to project the maximum expected gas generation flow rate instead of, or in conjunction with, the equations in paragraphs (a)(1)(i) and (ii) of this section. If the landfill is still accepting waste, the actual measured flow data will not equal the maximum expected gas generation rate, so calculations using the equations in paragraphs (a)(1)(i) or (ii) or other methods shall be used to predict the maximum expected gas generation rate over the intended period of use of the gas control system equipment.

(2) For the purposes of determining sufficient density of gas collectors for compliance with 60.752(b)(2)(ii)(A)(2), the owner or operator shall design a system of vertical wells, horizontal collectors, or other collection devices, satisfactory to the Administrator, capable of controlling and extracting gas from all portions of the landfill sufficient to meet all operational and performance standards.

(3) For the purpose of demonstrating whether the gas collection system flow rate is sufficient to determine compliance with 60.752(b)(2)(ii)(A)(3), the owner or operator shall measure gauge pressure in the gas collection header at each individual well, monthly. If a positive pressure exists, action shall be initiated to correct the exceedance within 5 calendar days, except for the three conditions allowed under 60.753(b). If negative pressure cannot be achieved without excess air infiltration within 15 calendar days of the first measurement, the gas collection system shall be expanded to correct the exceedance within 120 days of the initial measurement of positive pressure. Any attempted corrective measure shall not cause exceedances of other operational or performance standards. An alternative timeline for correcting the exceedance may be submitted to the Administrator for approval.

(4) Owners or operators are not required to install additional wells as required in paragraph(a)(3) of this section during the first 180 days after gas collection system start-up.

(5) For the purpose of identifying whether excess air infiltration into the landfill is occurring, the owner or operator shall monitor each well monthly for temperature and nitrogen or oxygen as provided in 60.753(c). If a well exceeds one of these operating parameters, action shall be initiated to correct the exceedance within 5 calendar days. If correction of the exceedance cannot be achieved within 15 calendar days of the first measurement, the gas collection system shall be

**SECTION C. Site Level Requirements**

expanded to correct the exceedance within 120 days of the initial exceedance. Any attempted corrective measure shall not cause exceedances of other operational or performance standards. An alternative timeline for correcting the exceedance may be submitted to the Administrator for approval.

(6) An owner or operator seeking to demonstrate compliance with 60.752(b)(2)(ii)(A)(4) through the use of a collection system not conforming to the specifications provided in 60.759 shall provide information satisfactory to the Administrator as specified in 60.752(b)(2)(i)(C) demonstrating that off-site migration is being controlled.

(b) For purposes of compliance with 60.753(a), each owner or operator of a controlled landfill shall place each well or design component as specified in the approved design plan as provided in 60.752(b)(2)(i). Each well shall be installed within 60 days of the date in which the initial solid waste has been in place for a period of:

- (1) 5 years or more if active; or
- (2) 2 years or more if closed or at final grade.

(c) The following procedures shall be used for compliance with the surface methane operational standard as provided in 60.753(d).

(1) After installation of the collection system, the owner or operator shall monitor surface concentrations of methane along the entire perimeter of the collection area and along a serpentine pattern spaced 30 meters apart (or a site-specific established spacing) for each collection area on a quarterly basis using an organic vapor analyzer, flame ionization detector, or other portable monitor meeting the specifications provided in paragraph (d) of this section.

(2) The background concentration shall be determined by moving the probe inlet upwind and downwind outside the boundary of the landfill at a distance of at least 30 meters from the perimeter wells.

(3) Surface emission monitoring shall be performed in accordance with section 8.3.1 of Method 21 of appendix A of this part, except that the probe inlet shall be placed within 5 to 10 centimeters of the ground. Monitoring shall be performed during typical meteorological conditions.

(4) Any reading of 500 parts per million or more above background at any location shall be recorded as a monitored exceedance and the actions specified in paragraphs (c)(4)(i) through (v) of this section shall be taken. As long as the specified actions are taken, the exceedance is not a violation of the operational requirements of 60.753(d).

(i) The location of each monitored exceedance shall be marked and the location recorded.

(ii) Cover maintenance or adjustments to the vacuum of the adjacent wells to increase the gas collection in the vicinity of each exceedance shall be made and the location shall be re-monitored within 10 calendar days of detecting the exceedance.

(iii) If the re-monitoring of the location shows a second exceedance, additional corrective action shall be taken and the location shall be monitored again within 10 days of the second exceedance. If the re-monitoring shows a third exceedance for the same location, the action specified in paragraph (c)(4)(v) of this section shall be taken, and no further monitoring of that location is required until the action specified in paragraph (c)(4)(v) has been taken.

(iv) Any location that initially showed an exceedance but has a methane concentration less than 500 ppm methane above background at the 10-day re-monitoring specified in paragraph (c)(4)(ii) or (iii) of this section shall be re-monitored 1 month from the initial exceedance. If the 1-month re-monitoring shows a concentration less than 500 parts per million above background, no further monitoring of that location is required until the next quarterly monitoring period. If the 1-month re-monitoring shows an exceedance, the actions specified in paragraph (c)(4)(iii) or (v) shall be taken.

(v) For any location where monitored methane concentration equals or exceeds 500 parts per million above background three times within a quarterly period, a new well or other collection device shall be installed within 120 calendar days of the

**SECTION C. Site Level Requirements**

initial exceedance. An alternative remedy to the exceedance, such as upgrading the blower, header pipes or control device, and a corresponding timeline for installation may be submitted to the Administrator for approval.

(5) The owner or operator shall implement a program to monitor for cover integrity and implement cover repairs as necessary on a monthly basis.

(6) The permittee shall conduct surface emissions monitoring according to the revised surface emission monitoring plan prepared and submitted to the PADEP and USEPA Region III in response to Administrative Compliance Order ("Order") by Consent effective December 4, 2004. This plan was approved by USEPA Region III on April 28, 2005.

(d) Each owner or operator seeking to comply with the provisions in paragraph (c) of this section shall comply with the following instrumentation specifications and procedures for surface emission monitoring devices:

(1) The portable analyzer shall meet the instrument specifications provided in section 3 of Method 21 of appendix A of this part, except that "methane" shall replace all references to VOC.

(2) The calibration gas shall be methane, diluted to a nominal concentration of 500 parts per million in air.

(3) To meet the performance evaluation requirements in section 3.1.3 of Method 21 of appendix A of this part, the instrument evaluation procedures of section 4.4 of Method 21 of appendix A of this part shall be used.

(4) The calibration procedures provided in section 4.2 of Method 21 of appendix A of this part shall be followed immediately before commencing a surface monitoring survey.

(e) The provisions of NSPS Subpart WWW and this permit apply at all times, except during periods of start-up, shutdown, or malfunction, provided that the duration of start-up, shutdown, or malfunction shall not exceed 5 days for collection systems and shall not exceed 1 hour for treatment or control devices.

**Additionally, Alternative Compliance procedures as provided for in accordance with 40 CFR Part 60. 753 (c) have been approved and can be found under Section C, Site Level requirements, Sections III. Monitoring Requirements and V. Reporting Requirements, Elective Restrictions.

**# 013 [40 CFR Part 61 NESHAPs §40 CFR 61.154]
Subpart M--National Emission Standard for Asbestos
Standard for active waste disposal sites.**

Each owner or operator of an active waste disposal site that receives asbestos-containing waste material from a source covered under 61.149, 61.150, or 61.155 shall meet the requirements of this section:

(a) Either there must be no visible emissions to the outside air from any active waste disposal site where asbestos-containing waste material has been deposited, or the requirements of paragraph (c) or (d) of this section must be met.

(b) Unless a natural barrier adequately deters access by the general public, either warning signs and fencing must be installed and maintained as follows, or the requirements of paragraph (c)(1) of this section must be met.

(1) Warning signs must be displayed at all entrances and at intervals of 100 m (330 ft) or less along the property line of the site or along the perimeter of the sections of the site where asbestos-containing waste material is deposited. The warning signs must:

(i) Be posted in such a manner and location that a person can easily read the legend; and

(ii) Conform to the requirements of 51 cm 36 cm (20"X14") upright format signs specified in 29 CFR 1910.145(d)(4) and this paragraph; and

(iii) Display the following legend in the lower panel with letter sizes and styles of a visibility at least equal to those



SECTION C. Site Level Requirements

specified in this paragraph.

Legend	Notation
Asbestos Waste Disposal Site Block	2.5 cm (1 inch) Sans Serif, Gothic or
Do Not Create Dust..... or Block	1.9 cm (3/4 inch) Sans Serif, Gothic
Breathing Asbestos is Hazardous to Your Health	14 Point Gothic.

Spacing between any two lines must be at least equal to the height of the upper of the two lines.

(2) The perimeter of the disposal site must be fenced in a manner adequate to deter access by the general public.

(3) Upon request and supply of appropriate information, the Administrator will determine whether a fence or a natural barrier adequately deters access by the general public.

(c) Rather than meet the no visible emission requirement of paragraph (a) of this section, at the end of each operating day, or at least once every 24-hour period while the site is in continuous operation, the asbestos-containing waste material that has been deposited at the site during the operating day or previous 24-hour period shall:

(1) Be covered with at least 15 centimeters (6 inches) of compacted nonasbestos-containing material, or

(2) Be covered with a resinous or petroleum-based dust suppression agent that effectively binds dust and controls wind erosion. Such an agent shall be used in the manner and frequency recommended for the particular dust by the dust suppression agent manufacturer to achieve and maintain dust control. Other equally effective dust suppression agents may be used upon prior approval by the Administrator. For purposes of this paragraph, any used, spent, or other waste oil is not considered a dust suppression agent.

(d) Rather than meet the no visible emission requirement of paragraph (a) of this section, use an alternative emissions control method that has received prior written approval by the Administrator according to the procedures described in 61.149(c)(2).

(e) For all asbestos-containing waste material received, the owner or operator of the active waste disposal site shall:

(1) Maintain waste shipment records, using a form similar to that shown in Figure 4, and include the following information:

(i) The name, address, and telephone number of the waste generator.

(ii) The name, address, and telephone number of the transporter(s).

(iii) The quantity of the asbestos-containing waste material in cubic meters (cubic yards).

(iv) The presence of improperly enclosed or uncovered waste, or any asbestos-containing waste material not sealed in leak-tight containers. Report in writing to the local, State, or EPA Regional office responsible for administering the asbestos NESHAP program for the waste generator (identified in the waste shipment record), and, if different, the local, State, or EPA Regional office responsible for administering the asbestos NESHAP program for the disposal site, by the

**SECTION C. Site Level Requirements**

following working day, the presence of a significant amount of improperly enclosed or uncovered waste. Submit a copy of the waste shipment record along with the report.

(v) The date of the receipt.

(2) As soon as possible and no longer than 30 days after receipt of the waste, send a copy of the signed waste shipment record to the waste generator.

(3) Upon discovering a discrepancy between the quantity of waste designated on the waste shipment records and the quantity actually received, attempt to reconcile the discrepancy with the waste generator. If the discrepancy is not resolved within 15 days after receiving the waste, immediately report in writing to the local, State, or EPA Regional office responsible for administering the asbestos NESHAP program for the waste generator (identified in the waste shipment record), and, if different, the local, State, or EPA Regional office responsible for administering the asbestos NESHAP program for the disposal site. Describe the discrepancy and attempts to reconcile it, and submit a copy of the waste shipment record along with the report.

(4) Retain a copy of all records and reports required by this paragraph for at least 2 years.

(f) Maintain, until closure, records of the location, depth and area, and quantity in cubic meters (cubic yards) of asbestos-containing waste material within the disposal site on a map or diagram of the disposal area.

(g) Upon closure, comply with all the provisions of 61.151.

(h) Submit to the Administrator, upon closure of the facility, a copy of records of asbestos waste disposal locations and quantities.

(i) Furnish upon request, and make available during normal business hours for inspection by the Administrator, all records required under this section.

(j) Notify the Administrator in writing at least 45 days prior to excavating or otherwise disturbing any asbestos-containing waste material that has been deposited at a waste disposal site and is covered. If the excavation will begin on a date other than the one contained in the original notice, notice of the new start date must be provided to the Administrator at least 10 working days before excavation begins and in no event shall excavation begin earlier than the date specified in the original notification. Include the following information in the notice:

(1) Scheduled starting and completion dates.

(2) Reason for disturbing the waste.

(3) Procedures to be used to control emissions during the excavation, storage, transport, and ultimate disposal of the excavated asbestos-containing waste material. If deemed necessary, the Administrator may require changes in the emission control procedures to be used.

(4) Location of any temporary storage site and the final disposal site.
(Secs. 112 and 301(a) of the Clean Air Act as amended (42 USC 7412, 7601(a))

014 [40 CFR Part 63 NESHAPS for Source Categories §40 CFR 63.1935]

Subpart AAAA - National Emission Standards for Hazardous Air Pollutants: Municipal Solid Waste Landfills

Am I subject to this subpart?

The Southern Alleghenies Landfill is subject to the requirements of 40 CFR Part 63 Subpart AAAA National Emission Standards for Hazardous Air Pollutants for Municipal Solid Waste Landfills.

**SECTION C. Site Level Requirements****II. TESTING REQUIREMENTS.****# 015 [25 Pa. Code §139.3]****General requirements.**

All source testing shall be conducted in accordance with Chapter 139, 40 CFR 60.754 and the Department's source testing procedures described in the latest Source Testing Manual referenced in 25 Pa Code 139.4(5) as follows:

139.4(5) Source Testing Manual, Commonwealth of Pennsylvania, Department of Environmental Resources, Bureau of Air Quality Control, Post Office Box 8468, Harrisburg, Pennsylvania 17105-8468, including future revisions as noted in 139.5(b) (relating to revisions to the source testing manual and continuous source monitoring manual).

016 [40 CFR Part 60 Standards of Performance for New Stationary Sources §40 CFR 60.754]**Subpart WWW--Standards of Performance for Municipal Solid Waste Landfills****Test methods and procedures.**

Because the landfill has calculated an NMOC mass emission rate greater than 50 megagrams per year, the owner or operator shall comply with 60.752(b)(2).

(b) After the installation of a collection and control system in compliance with 60.755, the owner or operator shall calculate the NMOC emission rate for purposes of determining when the system can be removed as provided in 60.752(b)(2)(v), using the following equation:

$$MNMOC = 1.89 \times 10^{-3} \text{ QLFG CNMOC}$$

where,

MNMOC = mass emission rate of NMOC, megagrams per year

QLFG = flow rate of landfill gas, cubic meters per minute

CNMOC = NMOC concentration, parts per million by volume as hexane

(1) The flow rate of landfill gas, QLFG, shall be determined by measuring the total landfill gas flow rate at the common header pipe that leads to the control device using a gas flow measuring device calibrated according to the provisions of section 4 of Method 2E of appendix A of this part.

(2) The average NMOC concentration, CNMOC, shall be determined by collecting and analyzing landfill gas sampled from the common header pipe before the gas moving or condensate removal equipment using the procedures in Method 25C or Method 18 of appendix A of this part. If using Method 18 of appendix A of this part, the minimum list of compounds to be tested shall be those published in the most recent Compilation of Air Pollutant Emission Factors (AP-42). The sample location on the common header pipe shall be before any condensate removal or other gas refining units. The landfill owner or operator shall divide the NMOC concentration from Method 25C of appendix A of this part by six to convert from CNMOC as carbon to CNMOC as hexane.

(3) The owner or operator may use another method to determine landfill gas flow rate and NMOC concentration if the method has been approved by the Administrator as provided in 60.752(b)(2)(i)(B).

(c) When calculating emissions for PSD purposes, the owner or operator of each MSW landfill subject to the provisions of this subpart shall estimate the NMOC emission rate for comparison to the PSD major source and significance levels in §§51.166 or 52.21 of this chapter using AP-42 or other approved measurement procedures.

(d) For the performance test required in 60.752(b)(2)(iii)(B), Method 25, 25C or Method 18 of appendix A of this part shall be used to determine compliance with 98 weight-percent efficiency or the 20 ppmv outlet concentration level, unless another method to demonstrate compliance has been approved by the Administrator as provided by 60.752(b)(2)(i)(B). Method 3 or 3A shall be used to determine oxygen for correcting the NMOC concentration as hexane to 3 percent. In cases where the outlet concentration is less than 50 ppm NMOC as carbon (8 ppm NMOC as hexane), Method 25A should be

**SECTION C. Site Level Requirements**

used in place of Method 25. If using Method 18 of appendix A of this part, the minimum list of compounds to be tested shall be those published in the most recent Compilation of Air Pollutant Emission Factors (AP-42). The following equation shall be used to calculate efficiency:

$$\text{Control Efficiency} = (\text{NMOC}_{\text{in}} - \text{NMOC}_{\text{out}}) / (\text{NMOC}_{\text{in}})$$

where,

NMOC_{in} = mass of NMOC entering control device

NMOC_{out} = mass of NMOC exiting control device

(e) For the performance test required in §60.752(b)(2)(iii)(A), the net heating value of the combusted landfill gas as determined in §60.18(f)(3) is calculated from the concentration of methane in the landfill gas as measured by Method 3C. A minimum of three 30-minute Method 3C samples are determined. The measurement of other organic components, hydrogen, and carbon monoxide is not applicable. Method 3C may be used to determine the landfill gas molecular weight for calculating the flare gas exit velocity under §60.18(f)(4).

III. MONITORING REQUIREMENTS.**# 017 [25 Pa. Code §123.43]****Measuring techniques**

Visible emissions may be measured using either of the following:

- (1) A device approved by the Department and maintained to provide accurate opacity measurements.
- (2) Observers, trained and qualified to measure plume opacity with the naked eye or with the aid of any devices approved by the Department.

018 [25 Pa. Code §127.511]**Monitoring and related recordkeeping and reporting requirements.**

A facility-wide inspection shall be conducted by the Owner/Operator, at a minimum of once each day, that the facility is in operation. The facility-wide inspection shall be conducted for the presence of the following:

- a. Visible stack emissions;
- b. Fugitive emissions; and
- c. Potentially objectionable odors at the property line.

These observations are to ensure continued compliance with source-specific visible emission limitations, fugitive emissions prohibited under 25 Pa. Code §§123.1 or 123.2, and malodors prohibited under 25 Pa. Code §123.31. This observation does not require that it be performed by a person certified as a qualified observer for EPA Method 9 for Visual Determination of the Opacity of Emissions from Stationary Sources. Observations for visible stack emissions shall be conducted during daylight hours and all observations shall be conducted while sources are in operation. If visible stack emissions, fugitive emissions, or potentially objectionable odors are apparent, the Owner/Operator shall take corrective action.

A log of fugitive, visible emission and malodor inspections shall be kept and maintained on site for five years. This log shall include at a minimum, date, time, observation, and action if necessary.

019 [40 CFR Part 60 Standards of Performance for New Stationary Sources §40 CFR 60.756]**Subpart WWW--Standards of Performance for Municipal Solid Waste Landfills****Monitoring of operations.**

Except as provided in 60.752(b)(2)(i)(B),

- (a) Each owner or operator seeking to comply with 60.752(b)(2)(ii)(A) for an active gas collection system shall install a sampling port and a thermometer, or other temperature measuring device, or an access port for temperature measurements at each wellhead and:

**SECTION C. Site Level Requirements**

- (1) Measure the gauge pressure in the gas collection header on a monthly basis as provided in 60.755(a)(3); and
- (2) Monitor nitrogen or oxygen concentration in the landfill gas on a monthly basis as provided in 60.755(a)(5); and
- (3) Monitor temperature of the landfill gas on a monthly basis as provided in 60.755(a)(5).

(b) Each owner or operator seeking to comply with 60.752(b)(2)(iii) using an enclosed combustor shall calibrate, maintain, and operate according to the manufacturer's specifications, the following equipment.

(1) A temperature monitoring device equipped with a continuous recorder and having a minimum accuracy of ± 1 percent of the temperature being measured expressed in degrees Celsius or ± 0.5 degrees Celsius, whichever is greater. A temperature monitoring device is not required for boilers or process heaters with design heat input capacity equal to or greater than 44 megawatts.

(2) A device that records flow to or bypass of the control device. The owner or operator shall either:

(i) Install, calibrate, and maintain a gas flow rate measuring device that shall record the flow to the control device at least every 15 minutes; or

(ii) Secure the bypass line valve in the closed position with a car-seal or a lock-and-key type configuration. A visual inspection of the seal or closure mechanism shall be performed at least once every month to ensure that the valve is maintained in the closed position and that the gas flow is not diverted through the bypass line.

(c) Each owner or operator seeking to comply with 60.752(b)(2)(iii) using an open flare shall install, calibrate, maintain, and operate according to the manufacturer's specifications the following equipment:

(1) A heat sensing device, such as an ultraviolet beam sensor or thermocouple, at the pilot light or the flame itself to indicate the continuous presence of a flame.

(2) A device that records flow to or bypass of the control device. The owner or operator shall either:

(i) Install, calibrate, and maintain a gas flow rate measuring device that shall record the flow to the control device at least every 15 minutes; or

(ii) Secure the bypass line valve in the closed position with a car-seal or a lock-and-key type configuration. A visual inspection of the seal or closure mechanism shall be performed at least once every month to ensure that the valve is maintained in the closed position and that the gas flow is not diverted through the bypass line.

(d) Each owner or operator seeking to demonstrate compliance with 60.752(b)(2)(iii) using a device other than an open flare or an enclosed combustor shall provide information satisfactory to the Administrator as provided in 60.752(b)(2)(i)(B) describing the operation of the control device, the operating parameters that would indicate proper performance, and appropriate monitoring procedures. The Administrator shall review the information and either approve it, or request that additional information be submitted. The Administrator may specify additional appropriate monitoring procedures.

(e) Each owner or operator seeking to install a collection system that does not meet the specifications in 60.759 or seeking to monitor alternative parameters to those required by 60.753 through 60.756 shall provide information satisfactory to the Administrator as provided in 60.752(b)(2)(i)(B) and (C) describing the design and operation of the collection system, the operating parameters that would indicate proper performance, and appropriate monitoring procedures. The Administrator may specify additional appropriate monitoring procedures.

(f) Each owner or operator seeking to demonstrate compliance with 60.755(c), shall monitor surface concentrations of methane according to the instrument specifications and procedures provided in 60.755(d). Any closed landfill that has no monitored exceedances of the operational standard in three consecutive quarterly monitoring periods may skip to annual monitoring. Any methane reading of 500 ppm or more above background detected during the annual monitoring returns the frequency for that landfill to quarterly monitoring.

SECTION C. Site Level Requirements

020 elective restriction

In accordance with 40 CFR Part 60. 753(c), alternative compliance requirements are allowed for specific categories of gas extraction wells as noted below:

Alternative 1: Wells in uncapped areas and leachate collection piping used for gas extraction may be operated at an oxygen level as high as 15 percent (volumetric basis), since the majority of the air intrusion occurs directly from the ground surface and not through the waste mass. Documentation of extraction point readings shall be performed as required to insure that the higher operating value does not cause an adverse reaction or combustion within the waste mass, and that degradation of the anaerobic decomposition process is not occurring. In the event that monitoring data for an Alternative 1 well indicates temperatures above 55°C (131°F), the well will be shut down. If the temperature does not subside to an acceptable level within 5 days, carbon monoxide monitoring (to ensure a carbon monoxide level below 100 ppmv) will be conducted to verify that combustion within the waste mass is not occurring.

Alternative 2: A well may be placed on an inactive list if it exhibits a methane quality that is consistently below 40 percent by volume and an oxygen level that is consistently above 5 percent while the throttle is either closed or slightly open with a negative pressure applied to the well of less than one-inch of water column. During the period of inactivity and while on the inactive list, the well will be exempt from oxygen concentration and negative pressure requirements. If at any time the landfill observes conditions that warrant the operation of a well on the inactive list, the well shall be reactivated and normal NSPS 40 CFR 60.753 (b) and (c) operational standards shall apply.

Alternative 3: A well in an area of active waste placement that is inaccessible due to its casing height (generally having a casing height of five feet or greater) may be temporarily placed on the inactive list, whereby the well would be exempt from wellhead monitoring requirements until landfilling around the well allows for safe access.

Alternative 4: A well may be operated at temperatures higher than 55°C (131°F), provided the following steps are taken:

(a) Upon observation of a well temperature greater than 55°C (131°F), the initial course of action shall be to adjust the valve to either reduce or eliminate the vacuum applied to the well. This corrective action shall be taken within 5 days of the observation of an elevated reading.

(b) If the reduction of vacuum favorably lowers the temperature but appears to be detrimental to gas collection, the operator shall adjust the well to the benefit of gas collection. If, as a result, the temperature climbs above 55°C (131°F), or if the temperature remained elevated throughout the well adjustments, carbon monoxide monitoring (to ensure carbon monoxide levels below 100 ppmv) will be conducted to verify that combustion within the waste mass is not occurring. In addition to measuring the temperature and carbon monoxide levels, the operator shall visually inspect the area around the well for signs of settlement or distressed vegetation, and shall inspect the wellhead for soot or other indications of combustion.

(c) If the elevated temperatures persist at a well, and there are no signs of combustion or detrimental effects on anaerobic activity, the operator shall consider the well to be an Alternative 4 well and shall place the well under a period of observation. The observation period shall be characterized by the inclusion of carbon monoxide monitoring with the regular monthly monitoring events. This monitoring is in addition to the regular measurement of gauge pressure, temperature, and oxygen or nitrogen levels. Visual inspection of the wellhead and the area immediately surrounding the well will also be conducted.

(d) At such time when the landfill has acquired sufficient background data, a new maximum operating temperature shall be selected for the well. The new temperature and supporting data shall be provided to PADEP and USEPA through a notification letter. If no objections are received from the regulatory agencies within 15 days of the letter submittal date, the landfill may conclude that the alternative temperature is acceptable. At that time, routine carbon monoxide monitoring of the well will be discontinued. However, visual inspection of the wellhead and the area immediately surrounding the well shall be included with the regular monthly monitoring events throughout the entire period of time that a well is operated under Alternative 4.

SECTION C. Site Level Requirements**IV. RECORDKEEPING REQUIREMENTS.****# 021 [25 Pa. Code §127.511]****Monitoring and related recordkeeping and reporting requirements.**

For paved roadways, the following records shall be maintained on-site and be made available to the Department upon request:

- i) Daily log of time and location of any water flushing or vacuum sweeping conducted.
- ii) Log of type, time, and location of any maintenance repairs, patching, or repaving of roads.
- iii) A log explaining why any water flushing or vacuum sweeping was not performed.

For unpaved roadways, the following records shall be maintained on-site, and be made available to the Department upon request:

- i) A daily log of time and location of treated areas.
- ii) An indication of dust suppressants used.
- iii) A log of dilution ratios of dust suppressants and diluent used if chemical suppressants are used.
- iv) A purchase record of all dust suppressants used.

022 [25 Pa. Code §135.5]**Recordkeeping**

Source owners or operators shall maintain and make available upon request by the Department records including computerized records that may be necessary to comply with 135.21 (relating to reporting; and emission statements). These may include records of production, fuel usage, maintenance of production or pollution control equipment or other information determined by the Department to be necessary for identification and quantification of potential and actual air contaminant emissions. If direct recordkeeping is not possible or practical, sufficient records shall be kept to provide the needed information by indirect means.

023 [40 CFR Part 60 Standards of Performance for New Stationary Sources §40 CFR 60.758]**Subpart WWW--Standards of Performance for Municipal Solid Waste Landfills****Recordkeeping requirements.**

Except as provided in 60.752(b) (2)(i)(B),

(a) Each owner or operator of an MSW landfill subject to the provisions of 60.752(b) shall keep for at least 5 years up-to-date, readily accessible, on-site records of the maximum design capacity, the current amount of solid waste in-place, and the year-by-year waste acceptance rate. Off-site records may be maintained if they are retrievable within 4 hours. Either paper copy or electronic formats are acceptable.

(b) Each owner or operator of a controlled landfill shall keep up-to-date, readily accessible records for the life of the control equipment of the data listed in paragraphs (b)(1) through (b)(4) of this section as measured during the initial performance test or compliance determination. Records of subsequent tests or monitoring shall be maintained for a minimum of 5 years. Records of the control device vendor specifications shall be maintained until removal.

(1) Where an owner or operator subject to the provisions of this subpart seeks to demonstrate compliance with 60.752(b)(2)(ii):

(i) The maximum expected gas generation flow rate as calculated in 60.755(a)(1). The owner or operator may use another method to determine the maximum gas generation flow rate, if the method has been approved by the Administrator.

(ii) The density of wells, horizontal collectors, surface collectors, or other gas extraction devices determined using the

**SECTION C. Site Level Requirements**

procedures specified in 60.759(a)(1).

(2) Where an owner or operator subject to the provisions of this subpart seeks to demonstrate compliance with 60.752(b)(2)(iii) through use of an enclosed combustion device other than a boiler or process heater with a design heat input capacity greater than 44 megawatts:

(i) The average combustion temperature measured at least every 15 minutes and averaged over the same time period of the performance test.

(ii) The percent reduction of NMOC determined as specified in 60.752(b)(2)(iii)(B) achieved by the control device.

(3) Where an owner or operator subject to the provisions of this subpart seeks to demonstrate compliance with 60.752(b)(2)(iii)(B)(1) through use of a boiler or process heater of any size: a description of the location at which the collected gas vent stream is introduced into the boiler or process heater over the same time period of the performance testing.

(4) Where an owner or operator subject to the provisions of this subpart seeks to demonstrate compliance with 60.752(b)(2)(iii)(A) through use of an open flare, the flare type (i.e., steam-assisted, air-assisted, or non-assisted), all visible emission readings, heat content determination, flow rate or bypass flow rate measurements, and exit velocity determinations made during the performance test as specified in 60.18; continuous records of the flare pilot flame or flare flame monitoring and records of all periods of operations during which the pilot flame of the flare flame is absent.

(c) Each owner or operator of a controlled landfill subject to the provisions of this subpart shall keep for 5 years up-to-date, readily accessible continuous records of the equipment operating parameters specified to be monitored in 60.756 as well as up-to-date, readily accessible records for periods of operation during which the parameter boundaries established during the most recent performance test are exceeded.

(1) The following constitute exceedances that shall be recorded and reported under 60.757(f):

(i) For enclosed combustors except for boilers and process heaters with design heat input capacity of 44 megawatts (150 million British thermal unit per hour) or greater, all 3-hour periods of operation during which the average combustion temperature was more than 28 oC below the average combustion temperature during the most recent performance test at which compliance with 60.752(b)(2)(iii) was determined.

(ii) For boilers or process heaters, whenever there is a change in the location at which the vent stream is introduced into the flame zone as required under paragraph (b)(3)(i) of this section.

(2) Each owner or operator subject to the provisions of this subpart shall keep up-to-date, readily accessible continuous records of the indication of flow to the control device or the indication of bypass flow or records of monthly inspections of car-seals or lock-and-key configurations used to seal bypass lines, specified under 60.756.

(3) Each owner or operator subject to the provisions of this subpart who uses a boiler or process heater with a design heat input capacity of 44 megawatts or greater to comply with 60.752(b)(2)(iii) shall keep an up-to-date, readily accessible record of all periods of operation of the boiler or process heater. (Examples of such records could include records of steam use, fuel use, or monitoring data collected pursuant to other State, local, Tribal, or Federal regulatory requirements.)

(4) Each owner or operator seeking to comply with the provisions of this subpart by use of an open flare shall keep up-to-date, readily accessible continuous records of the flame or flare pilot flame monitoring specified under 60.756(c), and up-to-date, readily accessible records of all periods of operation in which the flame or flare pilot flame is absent.

(d) Each owner or operator subject to the provisions of this subpart shall keep for the life of the collection system an up-to-date, readily accessible plot map showing each existing and planned collector in the system and providing a unique identification location label for each collector.

(1) Each owner or operator subject to the provisions of this subpart shall keep up-to-date, readily accessible records of the installation date and location of all newly installed collectors as specified under 60.755(b).

**SECTION C. Site Level Requirements**

(2) Each owner or operator subject to the provisions of this subpart shall keep readily accessible documentation of the nature, date of deposition, amount, and location of asbestos-containing or non-degradable waste excluded from collection as provided in 60.759(a)(3)(i) as well as any nonproductive areas excluded from collection as provided in 60.759(a)(3)(ii).

(e) Each owner or operator subject to the provisions of this subpart shall keep for at least 5 years up-to-date, readily accessible records of all collection and control system exceedances of the operational standards in 60.753, the reading in the subsequent month whether or not the second reading is an exceedance, and the location of each exceedance.

024 [40 CFR Part 63 NESHAPS for Source Categories §40 CFR 63.1980]**Subpart AAAA - National Emission Standards for Hazardous Air Pollutants: Municipal Solid Waste Landfills****What records and reports must I keep and submit?**

[Additional authority for this permit condition is also derived from 40 CFR 63.6(e)(3)(v) and (viii).]

(a) The permittee shall maintain at the affected source a current startup, shutdown, and malfunction plan and must make the plan available upon request for inspection and copying by the EPA. In addition, if the startup, shutdown, and malfunction plan is subsequently revised pursuant to paragraph (b) or 40 CFR Sec. 63.6(e)(3)(viii), the permittee must maintain at the affected source each previous (i.e., superseded) version of the startup, shutdown, and malfunction plan, and must make each such previous version available for inspection and copying by the EPA or the Department for a period of 5 years after revision of the plan. If at any time after adoption of a startup, shutdown, and malfunction plan the affected source ceases operation or is otherwise no longer subject to the provisions of this part, the permittee must retain a copy of the most recent plan for 5 years from the date the source ceases operation or is no longer subject to this part and must make the plan available upon request for inspection and copying by the EPA and the Department. The EPA or the Department may at any time request in writing that the owner or operator submit a copy of any startup, shutdown, and malfunction plan (or a portion thereof) which is maintained at the affected source or in the possession of the permittee. Upon receipt of such a request, the permittee must promptly submit a copy of the requested plan (or a portion thereof) to the EPA or the Department.

(b) The owner or operator may periodically revise the startup, shutdown, and malfunction plan for the affected source as necessary to satisfy the requirements of this part or to reflect changes in equipment or procedures at the affected source. Unless the permitting authority provides otherwise, the owner or operator may make such revisions to the startup, shutdown, and malfunction plan without prior approval by the EPA or the Department. However, each such revision to a startup, shutdown, and malfunction plan must be reported in the semiannual report required by Condition #021 [40 CFR Sec. 63.10(d)(5)]. If the startup, shutdown, and malfunction plan fails to address or inadequately addresses an event that meets the characteristics of a malfunction, but was not included in the startup, shutdown, and malfunction plan at the time the permittee developed the plan, the permittee must revise the startup, shutdown, and malfunction plan within 45 days after the event to include detailed procedures for operating and maintaining the source during similar malfunction events and a program of corrective action for similar malfunctions of process or air pollution control and monitoring equipment. In the event that the permittee makes any revision to the startup, shutdown, and malfunction plan which alters the scope of the activities at the source which are deemed to be a startup, shutdown, or malfunction, or otherwise modifies the applicability of any emission limit, work practice requirement, or other requirement in a standard established under this part, the revised plan shall not take effect until after the owner or operator has provided a written notice describing the revision to the EPA and the Department.

V. REPORTING REQUIREMENTS.**# 025 [25 Pa. Code §127.441]****Operating permit terms and conditions.**

In accordance with Plan Approval PA-56-00181B, Condition # 16(e), the owner/operator may add additional wells and piping as necessary to meet operational requirements. The owner/operator shall inform both Bureau of Waste Management (BWM) and Air Quality (AQ) by letter at least 15 days ahead of time of their intentions. As-built drawings shall be submitted within 60 days of installation of new wells.

**SECTION C. Site Level Requirements****# 026 [25 Pa. Code §127.442]****Reporting requirements.**

- (a) The owner or operator shall submit by March 1 of each year an Annual Inventory and Emission Statement for the previous year on forms provided by the Department. The report shall include information for all previously reported sources, new sources which were first operated during the proceeding calendar year and sources modified during the same period which were not previously reported.
- (b) The owner or operator may request an extension of time from the Department for the filing of a source report, and the Department may grant the extension for reasonable cause.
- (c) In accordance with Plan Approval PA-56-00181B, Condition #19(d), the owner/operator shall include with the Annual Inventory and Emission Statement a forecast of the total (before controls) NMOC emission generation rate anticipated each year for the next 5 years. Additionally, owner/operator shall calculate the actual NMOC emission rate, taking into account collection efficiencies and total destruction efficiencies achieved through the use of the landfill gas collection and destruction system. Forecast shall describe the current and scheduled collection system configurations for the forecast years, and shall include emissions from the actual waste in place, and the waste scheduled to be collected during the forecast years.
- 1) The owner/operator shall use the value of the methane generation rate constant, k , published at the most recent compilation of air pollution emission factors (AP-42) to calculate NMOC emission rates. Other values of k may be used, provided that the use of an alternate value can be demonstrated through testing or engineering calculations.
 - 2) The owner/operator shall use the value of the methane generation potential, L_0 , published at the most recent compilation of air pollution emission factors (AP-42) to calculate NMOC emission rates. Other values of L_0 may be used, provided that the use of an alternate value can be demonstrated through testing or engineering calculations.
 - 3) The NMOC concentration determined during the most recent test shall be used when calculating NMOC emission rates.

027 [25 Pa. Code §127.442]**Reporting requirements.**

Malfunction reporting shall be conducted as follows:

- a) For the purpose of this condition, a malfunction is defined as any sudden, infrequent, and not reasonably preventable failure of air pollution control equipment or source to operate in a normal or usual manner that may result in an increase in the emission of air contaminants. Examples of malfunctions may include, but are not limited to: large dust plumes, heavy smoke, a spill or release that results in a malodor that is detectable outside the property on whose land the source is being operated.
- b) Any malfunction that poses an imminent danger to the public health, safety, or welfare or to the environment shall be reported by telephone to the County Emergency Management Agency (911 Center), and to the 24-hour Emergency Hotline of the appropriate DEP Regional Office (Phone (412)442-4000), no later than one hour after the discovery of an incident. Following the telephone notification, a written notice shall be submitted to the DEP, no later than the next business day.
- c) All other malfunctions shall be reported to the Department no later than the next business day.
- d) Initial reporting of the malfunction shall identify the following items to the extent known:
 - i. name and location of the facility;
 - ii. nature and cause of the malfunction;
 - iii. time when the malfunction or breakdown was first observed;
 - iv. expected duration of increased emissions; and
 - v. estimated rate of emissions.
- e) The Owner/Operator shall also notify the Department immediately, by telephone, when corrective measures for malfunctions meeting the criteria in (b) have been accomplished.
- f) All malfunctions shall be reported to the Department by email (Addresses will be provided by the Department.), or by regular mail, at the address below:
PA DEP

**SECTION C. Site Level Requirements**

Office of Air Quality
400 Waterfront Drive
Pittsburgh, PA 15222-4745

412-442-4000

g) If requested by the Department, the Owner/Operator shall submit a full written report to the Department, including final determinations of the items identified in du, and the corrective measures taken on the malfunction. The report shall be submitted within 15 days of the Department's request or accomplishing corrective measures, whichever is later.

028 [25 Pa. Code §127.511]**Monitoring and related recordkeeping and reporting requirements.**

(c) With respect to reporting, the permit shall incorporate the applicable reporting requirements and require the following:

(1) Submittal of reports of required monitoring at least every 6 months. Instances of deviations from permit requirements shall be clearly identified in the reports, Required reports shall be certified by a responsible official.

(2) Reporting of deviations from permit requirements within the time required by the terms and conditions of the permit including those attributable to upset conditions as defined in the permit, the probable cause of the deviations and corrective actions or preventive measures taken, except that sources with continuous emission monitoring systems shall report according to the protocol established and approved by the Department for the source.

029 [25 Pa. Code §127.513]**Compliance certification.**

Permittee shall submit Compliance Certification Forms sufficient to demonstrate compliance with terms and conditions contained in the permit. Each Compliance Certification shall include the following:

- (a) The identification of each term or condition of the permit that is the basis of the certification.
- (b) The compliance status.
- (c) The methods used for determining the compliance status of the source, currently and over the reporting period.
- (d) Whether compliance was continuous or intermittent.
- (e) Other facts the Department may require to determine the compliance status of the source.

Compliance Certifications shall be submitted to the Administrator of the EPA, as well as to the Department. EPA requests that Compliance Certifications be e-mailed to them at the following address: R3_APD_Permits@epa.gov

030 [25 Pa. Code §127.513]**Compliance certification.**

Owner/operator shall submit a Title V Compliance Certification for this facility by January 31 of each year. The Title V Compliance Certification shall cover the previous calendar year, for the period January 1 through December 31. However, in accordance with Title 25 PA Code § 127.513(5)(i), in no case shall the Title V Compliance Certification be submitted less often than annually. This may require that an interim Title V Compliance Certification (covering a period less than one year) be submitted to bring the facility into compliance with this schedule.

031 [25 Pa. Code §135.21]**Emission statements**

(a) The owner or operator shall provide the Department with a statement, in a form as the Department may prescribe, for classes or categories of sources, showing the actual emissions of oxides of nitrogen and VOCs from that source for each reporting period, a description of the method used to calculate the emissions and the time period over which the

**SECTION C. Site Level Requirements**

calculation is based. The statement shall contain a certification by a company officer or the plant manager that the information contained in the statement is accurate.

(b) Annual emission statements are due by March 1 for the preceeding calendar year. Statements shall provide data consistent with requirements and guidance developed by the EPA. The guidance is available from:

United States Environmental Protection Agency
401 M. Street, S.W.
Washington, D.C. 20460.

(c) The Department may require more frequent submittals upon determination that one or more of the following applies:

- (1) A more frequent submission is required by the EPA
- (2) Analysis of the data on a more frequent basis is necessary to implement the requirements of the Act.

032 [25 Pa. Code §135.3]**Reporting**

(a) A person who owns or operates a source to which this chapter applies, and who has previously been advised by the Department to submit a source report, shall submit by March 1 of each year a source report for the preceding calendar year. The report shall include information for all previously reported sources, new sources which were first operated during the proceeding calendar year and sources modified during the same period which were not previously reported.

(b) A person who receives initial notification by the Department that a source report is necessary shall submit an initial source report within 60 days after receiving the notification or by March 1 of the year following the year for which the report is required, whichever is later.

(c) A source owner or operator may request an extension of time from the Department for the filing of a source report, and the Department may grant the extension for reasonable cause.

033 [40 CFR Part 60 Standards of Performance for New Stationary Sources §40 CFR 60.4]**Subpart A - General Provisions****Address.**

This source is subject to 40 CFR 60, Subpart Cc, and shall comply with all applicable requirements therein. Per 40 CFR 60.4, copies of all requests, reports, applications, submittals, and other communications shall be submitted to both EPA and the Department at the following addresses:

Regional Air Quality Manager
PADEP
400 Waterfront Drive
Pittsburgh, PA 15222-4745

and

Director
Air Toxics, and Radiation Div.
EPA Region III
1650 Arch Street
Philadelphia, PA 19103

034 [40 CFR Part 60 Standards of Performance for New Stationary Sources §40 CFR 60.757]**Subpart WWW--Standards of Performance for Municipal Solid Waste Landfills****Reporting requirements.**

(d) Each owner or operator of a controlled landfill shall submit a closure report to the Administrator within 30 days of waste acceptance cessation. The Administrator may request additional information as may be necessary to verify that permanent closure has taken place in accordance with the requirements of 40 CFR258.60. If a closure report has been submitted to the Administrator, no additional wastes may be placed into the landfill without filing a notification of

**SECTION C. Site Level Requirements**

modification as described under 60.7(a)(4).

(e) Each owner or operator of a controlled landfill shall submit an equipment removal report to the Administrator 30 days prior to removal or cessation of operation of the control equipment.

(1) The equipment removal report shall contain all of the following items:

(i) A copy of the closure report submitted in accordance with paragraph (d) of this section;

(ii) A copy of the initial performance test report demonstrating that the 15 year minimum control period has expired; and

(iii) Dated copies of three successive NMOC emission rate reports demonstrating that the landfill is no longer producing 50 megagrams or greater of NMOC per year.

(2) The Administrator may request such additional information as may be necessary to verify that all of the conditions for removal in 60.752(b)(2)(v) have been met.

(f) Each owner or operator of a landfill seeking to comply with 60.752(b)(2) using an active collection system designed in accordance with 60.752(b)(2)(ii) shall submit to the Administrator annual reports of the recorded information in (f)(1) through (f)(6) of this paragraph. The initial annual report shall be submitted within 180 days of installation and start-up of the collection and control system, and shall include the initial performance test report required under 60.8. For enclosed combustion devices and flares, reportable exceedances are defined under 60.758(c).

(1) Value and length of time for exceedance of applicable parameters monitored under 60.756(a), (b), (c), and (d).

(2) Description and duration of all periods when the gas stream is diverted from the control device through a bypass line or the indication of bypass flow as specified under 60.756.

(3) Description and duration of all periods when the control device was not operating for a period exceeding 1 hour and length of time the control device was not operating.

(4) All periods when the collection system was not operating in excess of 5 days.

(5) The location of each exceedance of the 500 parts per million methane concentration as provided in 60.753(d) and the concentration recorded at each location for which an exceedance was recorded in the previous month.

(6) The date of installation and the location of each well or collection system expansion added pursuant to paragraphs (a)(3), (b), and (c)(4) of 60.755.

035 [40 CFR Part 63 NESHAPS for Source Categories §40 CFR 63.1980]

Subpart AAAA - National Emission Standards for Hazardous Air Pollutants: Municipal Solid Waste Landfills

What records and reports must I keep and submit?

[Additional authority for this permit condition is also derived from 40 CFR 63.6(e)(3)(iii)]

Startup, shutdown, and malfunction plan.

When actions taken by the permittee during a startup, shutdown (and the start-up or shutdown causes the source to exceed any applicable emission limitation in the relevant emission standard), or malfunction (including actions taken to correct a malfunction) are consistent with the procedures specified in the affected source's startup, shutdown, and malfunction plan, the permittee must keep records for that event which demonstrate that the procedures specified in the plan were followed. These records may take the form of a checklist, or other effective form of recordkeeping that confirms conformance with the startup, shutdown, and malfunction plan for that event. In addition, the permittee must keep records of these events as specified in 40 CFR Sec. 63.10(b), including records of the occurrence and duration of each startup, shutdown (and the start up or shutdown causes the source to exceed any applicable emission limitation in the relevant

**SECTION C. Site Level Requirements**

emission standard), or malfunction of operation and each malfunction of the air pollution control and monitoring equipment. Furthermore, the permittee shall confirm that actions taken during the relevant reporting period during periods of startup, shutdown, and malfunction were consistent with the affected source's startup, shutdown and malfunction plan in the semiannual (or more frequent) startup, shutdown, and malfunction report required in 40 CFR Sec. 63.10(d)(5).

036 [40 CFR Part 63 NESHAPS for Source Categories §40 CFR 63.1980]**Subpart AAAA - National Emission Standards for Hazardous Air Pollutants: Municipal Solid Waste Landfills****What records and reports must I keep and submit?**

[Additional authority for this permit condition is also derived from 40 CFR 63.6(e)(3)(iv)]

If an action taken by the permittee during a startup, shutdown, or malfunction (including an action taken to correct a malfunction) is not consistent with the procedures specified in the affected source's startup, shutdown, malfunction plan, and the source exceeds any applicable emission limitation in the relevant emission standard, then the permittee must record the actions taken for that event and must report such actions within 2 working days after commencing actions inconsistent with the plan, followed by a letter within 7 working days after the end of the event (unless the permittee makes alternative reporting arrangements, in advance, with the EPA or the Department). The letter shall contain the name, title and signature of a responsible official who is certifying its accuracy, explaining the circumstances of the event, the reasons for not following the startup, shutdown and malfunction plan, describing all excess emissions and/or parameter monitoring exceedances which are believed to have occurred (or could have occurred in the case of malfunctions), and actions taken to minimize emissions in conformance with 40 CFR 63.6(e)(1)(i).

037 [40 CFR Part 63 NESHAPS for Source Categories §40 CFR 63.1980]**Subpart AAAA - National Emission Standards for Hazardous Air Pollutants: Municipal Solid Waste Landfills****What records and reports must I keep and submit?**

[Additional authority for this permit condition is also derived from 40 CFR 63.10(d)(5)]

(a) The permittee shall submit the reports semi-annually and the report shall (i) identify any instance during which actions taken by the permittee during a start-up, shutdown (and the startup or shutdown caused the source to exceed an applicable emission limitation in the relevant emission standards), or malfunction of an affected source (including actions taken to correct a malfunction) were consistent with the procedures specified in the start-up, shutdown, and malfunction plan.

(ii) include the number, duration, and a brief description for each type of malfunction which occurred during the reporting period and which caused or may have caused any applicable emission limitation to be exceeded.

(iii) consist of a letter, containing the name, title, and signature of the owner or operator or other responsible official who is certifying its accuracy.

(iv) be delivered or postmarked by the 30th day following the end of each calendar half (or other calendar reporting period, as appropriate).

(b) Reports shall only be required if a startup or shutdown caused the source to exceed an applicable emission limitation in the relevant emission standards, or if a malfunction occurred during the reporting period that caused, or had the potential to cause the source to exceed a relevant emission standard.

038 elective restriction

The following requirements apply to landfill gas extraction wells:

1. In all recordkeeping and compliance reporting to regulatory agencies, the landfill shall identify the basis for determination of compliance of each well (i.e., which conditions apply-default NSPS, Alternative 1, Alternative 2, Alternative 3, or Alternative 4). A summary list of all inactive LFG wells shall be provided in each semi-annual monitoring report. This list will include the rationale for placing each well on the list, and the dates that they were deemed inactive.

2. Any notification regarding the use of an alternative maximum operating temperature ("Alternative 4") for a well shall be submitted to both PADEP and USEPA. The notification shall show supporting data sufficient to show that no combustion is

**SECTION C. Site Level Requirements**

occurring and that anaerobic activity is not adversely affected. If no objections are received from the regulatory agencies within 15 days of the letter submittal date, the landfill may conclude that the alternative temperature is acceptable.

3. In the event that carbon monoxide readings indicate possible combustion within the waste mass, the landfill shall promptly notify PADEP and the USEPA Region 3. Details regarding the cause of the elevated carbon monoxide readings and actions taken for remediation will be submitted as soon as they are available. All parameter exceedances for the LFG extraction devices operated under Alternatives 1 or 4 (i.e., for pressure, temperature, oxygen, and carbon monoxide, if applicable) shall be included in the semi-annual and annual Title V compliance certification reports.

VI. WORK PRACTICE REQUIREMENTS.**# 039 [25 Pa. Code §127.441]****Operating permit terms and conditions.**

The owner/operator shall comply with the fugitive emission standards established in this permit. All reasonable actions shall be taken to prevent particulate matter from aforementioned activities from becoming airborne. All roadways shall be maintained as specified in the Form (A) (Air Resources Protection) which was submitted as part of the BWM application. This document shall be kept on-site.

a) Paved roadways shall be flushed with a pressurized water truck or similar vehicle. If this method of control is deemed to be inadequate, the Department reserves the right to require the use of a vacuum type sweeper to further control fugitive emissions.

Unpaved roadways shall be treated on a preventative basis using dust suppressants and/or water to minimize fugitive dust generation. All road surfaces shall be maintained so that dust control measures can be effectively applied or operated.

b) All vehicles which come into contact with unpaved roadways shall be processed through an operating truck wash as needed before exiting the facility in order to prevent any mud, waste, or debris from being tracked onto the approach route(s).

c) A pressurized water truck or similar vehicle shall be available on site to minimize the generation of fugitive dust from landfill construction, filling, or covering operations.

d) Vehicular traffic operating within the landfill shall be limited to a 15 mph speed limit. Clear legible notices of this speed limit shall be posted on all access routes.

040 [25 Pa. Code §127.441]**Operating permit terms and conditions.**

All air cleaning devices and air contamination sources at the facility shall be operated and maintained in accordance with manufacturer's specification and good air pollution and engineering practices.

VII. ADDITIONAL REQUIREMENTS.**# 041 [25 Pa. Code §127.441]****Operating permit terms and conditions.**

The owner/operator shall comply with all the applicable requirements of 40 CFR 60, Subpart Cc (relating to Emission Guidelines and Compliance Times for Municipal Solid Waste Landfills) which implement the Section 111(d) requirements of the Clean Air Act. The applicable requirements include emission standards, operational standards, test methods and procedures, initial design capacity report, and monitoring, recordkeeping and reporting requirements.

042 [40 CFR Part 60 Standards of Performance for New Stationary Sources §40 CFR 60.752]**Subpart WWW--Standards of Performance for Municipal Solid Waste Landfills
Standards for air emissions from municipal solid waste landfills.**

40 CFR 60.752(B)(2)

If the calculated NMOC emission rate is equal to or greater than 50 megagrams per year, as established during the reporting process as described in the permit, the owner or operator shall:

**SECTION C. Site Level Requirements**

- (ii) Install a collection and control system within 18 months of the submittal of the design plan under paragraph (b)(2)(i) of this section that effectively captures the gas generated within the landfill.
- (A) An active collection system shall:
- (1) Be designed to handle the maximum expected gas flow rate from the entire area of the landfill that warrants control over the intended use period of the gas control or treatment system equipment;
 - (2) Collect gas from each area, cell, or group of cells in the landfill in which the initial solid waste has been placed for a period of: (i) 5 years or more if active; or (ii) 2 years or more if closed or at final grade;
 - (3) Collect gas at a sufficient extraction rate;
 - (4) Be designed to minimize off-site migration of subsurface gas.
- (iii) Route all the collected gas to a control system that complies with the requirements in either paragraph (A), (B) or (C) of this section.
- (A) An open flare designed and operated in accordance with 60.18 except as noted in 60.754(e).
- (B) A control system designed and operated to reduce NMOC by 98 weight-percent, or, when an enclosed combustion device is used for control, to either reduce NMOC by 98 weight percent or reduce the outlet NMOC concentration to less than 20 parts per million by volume, dry basis as hexane at 3 percent oxygen. The reduction efficiency or parts per million by volume shall be established by an initial performance test, using the test methods specified in 60.754(d).
- (1) If a boiler or process heater is used as the control device, the landfill gas stream shall be introduced into the flame zone.
 - (2) The control device shall be operated within the parameter ranges established during the initial or most recent performance test. The operating parameters to be monitored are specified in 60.756;
- (C) Route the collected gas to a treatment system that processes the collected gas for subsequent sale or use. All emissions from any atmospheric vent from the gas treatment system shall be subject to the requirements of paragraph (b)(2)(iii) (A) or (B) of this section.
- (iv) Operate the collection and control device installed to comply with this subpart in accordance with the provisions of 60.753, 60.755 and 60.756.
- (v) The collection and control system may be capped or removed provided that all the conditions of paragraphs (b)(2)(v)(A), (B), and (C) of this section are met:
- (A) The landfill shall be no longer accepting solid waste and be permanently closed under the requirements of 258.60 of this title. A closure report shall be submitted to the Administrator as provided in 60.757(d);
 - (B) The collection and control system shall have been in operation a minimum of 15 years; and
 - (C) Following the procedures specified in 60.754(b) of this subpart, the calculated NMOC gas produced by the landfill shall be less than 50 megagrams per year on three successive test dates. The test dates shall be no less than 90 days apart, and no more than 180 days apart.

043 [40 CFR Part 60 Standards of Performance for New Stationary Sources §40 CFR 60.753]
Subpart WWW--Standards of Performance for Municipal Solid Waste Landfills
Operational standards for collection and control systems.

Each owner or operator of an MSW landfill gas collection and control system used to comply with the provisions of 60.752(b)(2)(ii) of this subpart shall:

**SECTION C. Site Level Requirements**

(a) Operate the collection system such that gas is collected from each area, cell, or group of cells in the MSW landfill in which solid waste has been in place for:

- (1) 5 years or more if active; or
- (2) 2 years or more if closed or at final grade;

(b)* Operate the collection system with negative pressure at each wellhead except under the following conditions:

- (1) A fire or increased well temperature. The owner or operator shall record instances when positive pressure occurs in efforts to avoid a fire. These records shall be submitted with the annual reports as provided in 60.757(f)(1);
- (2) Use of a geomembrane or synthetic cover. The owner or operator shall develop acceptable pressure limits in the design plan;
- (3) A decommissioned well. A well may experience a static positive pressure after shut down to accommodate for declining flows. All design changes shall be approved by the Administrator.

(c)* Operate each interior wellhead in the collection system with a landfill gas temperature less than 55 C and with either a nitrogen level less than 20 percent or an oxygen level less than 5 percent. The owner or operator may establish a higher operating temperature, nitrogen, or oxygen value at a particular well.** A higher operating value demonstration shall show supporting data that the elevated parameter does not cause fires or significantly inhibit anaerobic decomposition by killing methanogens.

(1) The nitrogen level shall be determined using Method 3C, unless an alternative test method is established as allowed by 60.752(b)(2)(i) of this subpart.

(2) Unless an alternative test method is established as allowed by 60.752(b)(2)(i) of this subpart, the oxygen shall be determined by an oxygen meter using Method 3A or 3C except that:

- (i) The span shall be set so that the regulatory limit is between 20 and 50 percent of the span;
- (ii) A data recorder is not required;
- (iii) Only two calibration gases are required, a zero and span, and ambient air may be used as the span;
- (iv) A calibration error check is not required;
- (v) The allowable sample bias, zero drift, and calibration drift are 10 percent.

(d) Operate the collection system so that the methane concentration is less than 500 parts per million above background at the surface of the landfill. To determine if this level is exceeded, the owner or operator shall conduct surface testing around the perimeter of the collection area along a pattern that traverses the landfill at 30 meter intervals and where visual observations indicate elevated concentrations of landfill gas, such as distressed vegetation and cracks or seeps in the cover. The owner or operator may establish an alternative traversing pattern that ensures equivalent coverage. A surface monitoring design plan shall be developed that includes a topographical map with the monitoring route and the rationale for any site-specific deviations from the 30 meter intervals. Areas with steep slopes or other dangerous areas may be excluded from the surface testing.

(e) Operate the system such that all collected gases are vented to a control system designed and operated in compliance with 60.752(b)(2)(iii). In the event the collection or control system is inoperable, the gas mover system shall be shut down and all valves in the collection and control system contributing to venting of the gas to the atmosphere shall be closed within 1 hour; and

(f) Operate the control or treatment system at all times when the collected gas is routed to the system.

**SECTION C. Site Level Requirements**

(g) If monitoring demonstrates that the operational requirement in paragraphs (b), (c), or (d) of this section are not met, corrective action shall be taken as specified in 60.752(a)(3) through (5) or 60.755(c) of this subpart. If corrective actions are taken as specified in 60.755, the monitored exceedance is not a violation of the operational requirements in this section.

*This language has been clarified through plan approval conditions. Please refer to Section C, Site Level Requirements, VII. Additional Requirements, Elective restrictions for the approved clarified language.

**Additionally, Alternative Compliance procedures as provided for in accordance with 40 CFR Part 60.753 (c) have been approved and can be found under Section C, Site Level requirements, Sections III. Monitoring Requirements and V. Reporting Requirements, Elective Restrictions.

044 [40 CFR Part 61 NESHAPs §40 CFR 61.12]

Subpart A--General Provisions

Compliance with standards and maintenance requirements.

In accordance with 40 CFR 61.12(c), the owner or operator of each stationary source shall maintain and operate the source, including associated equipment for air pollution control, in a manner consistent with good air pollution control practice for minimizing emissions. Determination of whether acceptable operating and maintenance procedures are being used will be based on information available to the Administrator which may include, but is not limited to, monitoring results, review of operating and maintenance procedures, and inspection of the source.

045 [40 CFR Part 63 NESHAPS for Source Categories §40 CFR 63.1980]

Subpart AAAA - National Emission Standards for Hazardous Air Pollutants: Municipal Solid Waste Landfills

What records and reports must I keep and submit?

[Additional authority for this permit condition is also derived from 40 CFR 63.6(e)(1)(i) and (ii)]

(a) During a period of startup, shutdown, or malfunction, the general duty to minimize emissions requires that the owner or operator reduce emissions from the affected source to the greatest extent which is consistent with safety and good air pollution control practices. The general duty to minimize emissions during a period of startup, shutdown, or malfunction does not require the permittee to achieve emission levels that would be required by the applicable standard at other times if this is not consistent with safety and good air pollution control practices, nor does it require the owner or operator to make any further efforts to reduce emissions if levels required by the applicable standard have been achieved.

(b) Malfunctions must be corrected as soon as practicable after their occurrence in accordance with the startup, shutdown, and malfunction, plan pursuant to 40 CFR Sec 63.6(e)(3). To the extent that an unexpected event arises during a startup, shutdown, or malfunction, an owner or operator must comply by minimizing emissions during such a startup, shutdown, and malfunction event consistent with safety and good air pollution control practices.

046 elective restriction

The original Operating Permit, Source Level Requirements #007 and #010 provided the following additions and clarifications to 40 CFR 60.753 (b) and(c):

The owner/operator shall operate the collection system with negative pressure at each wellhead except under the following additional conditions:

(b)(4) When collection or control systems are experiencing down times due to routine maintenance. Routine equipment maintenance includes gas collection header repairs, wellhead and valve repairs, replacement or modifications, and other similar activities; and

(b)(5) When negative pressure has the potential to induce air intrusion.

(c) Operate each interior wellhead in the collection system with a landfill gas temperature less than 55°C and with either a nitrogen level less than 20 percent or an oxygen level less than 5 percent. The owner or operator may establish a higher



SECTION C. Site Level Requirements

operating temperature, nitrogen, or oxygen value at a particular well. A higher operating value demonstration shall show supporting data that the elevated parameter does not cause fires or significantly inhibit anaerobic decomposition by killing methanogens. These requirements do not apply to wells outside of the waste mass or to wells that meet specific Administrator-approved criteria that allow a temporary inactive status designation.

VIII. COMPLIANCE CERTIFICATION.

No additional compliance certifications exist except as provided in other sections of this permit including Section B (relating to Title V General Requirements).

IX. COMPLIANCE SCHEDULE.

No compliance milestones exist.


***** Permit Shield In Effect *****

SECTION D. Source Level Requirements

Source ID: 101

Source Name: VEHICULAR TRAFFIC ON PAVED & UNPAVED RDS

Source Capacity/Throughput:

**I. RESTRICTIONS.**

No additional requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

IV. RECORDKEEPING REQUIREMENTS.

No additional record keeping requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

VI. WORK PRACTICE REQUIREMENTS.

No additional work practice requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

VII. ADDITIONAL REQUIREMENTS.

No additional requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

***** Permit Shield in Effect. *****

**SECTION D. Source Level Requirements**

Source ID: 107

Source Name: PAINT SPRAYING

Source Capacity/Throughput:

I. RESTRICTIONS.**Emission Restriction(s).****# 001 [25 Pa. Code §129.52]****Surface coating processes**

A person may not cause or permit the emission into the outdoor atmosphere of VOCs from a surface coating process unless the following limitation is met:

(1) The weight of VOCs per gallon of coating (minus water) is equal to or less than the level specified in Table I after adjustment to a standard solvent density of 7.36 pounds per gallon and to a solids basis.

TABLE I Allowable Content of VOCs in Surface Coatings by Process Allowable VOC Content Weight of VOC per Volume of Coating (minus water)

Surface Coating Processes	pounds per gallon liter	kg. per liter
10. Miscellaneous metal parts and products adopted on April 21, 1981		
(a) top coats for locomotives and heavy-duty trucks	3.50	0.42
(b) hopper car and tank car interiors	3.50	0.42
(c) pail and drum interiors	4.30	0.52
(d) clear coatings	4.30	0.52
(e) air-dried coatings	3.50	0.42
(f) extreme performance coatings	3.50	0.42
(g) all other coatings	3.00	0.36

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

IV. RECORDKEEPING REQUIREMENTS.**# 002 [25 Pa. Code §129.52]****Surface coating processes**

The owner/operator shall maintain records sufficient to demonstrate compliance with this section. At a minimum, a facility shall maintain monthly records of the gallons of coating used, the coating density before and after addition of diluents, the gallons of diluents used and the density of the diluents, the gallons of water contained in the coating and the weight percent of the organic volatiles in the coating. The records shall be maintained on-site for 5 years and shall be submitted to the Department upon request.



SECTION D. Source Level Requirements

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

VI. WORK PRACTICE REQUIREMENTS.

No additional work practice requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

VII. ADDITIONAL REQUIREMENTS.

No additional requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

***** Permit Shield in Effect. *****

SECTION D. Source Level Requirements

Source ID: 201

Source Name: EMERGENCY GENERATORS(2)-DIESEL

Source Capacity/Throughput:


**I. RESTRICTIONS.****Emission Restriction(s).****# 001 [25 Pa. Code §127.441]****Operating permit terms and conditions.**

Table 2d to Subpart ZZZZ of Part 63— Requirements for Existing Stationary RICE Located at Area Sources of HAP Emissions:

Emergency stationary CI RICE and black start stationary CI RICE

- a. Change oil and filter every 500 hours of operation or annually, whichever comes first;
- b. Inspect air cleaner every 1,000 hours of operation or annually, whichever comes first, and replace as necessary; and
- c. Inspect all hoses and belts every 500 hours of operation or annually, whichever comes first, and replace as necessary.

002 [25 Pa. Code §127.441]**Operating permit terms and conditions.**

Each of the emergency generators shall be limited to 500 hours of operation annually.

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

IV. RECORDKEEPING REQUIREMENTS.**# 003 [25 Pa. Code §127.511]****Monitoring and related recordkeeping and reporting requirements.**

Records of fuel usage shall be kept and maintained on site for five years.

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

VI. WORK PRACTICE REQUIREMENTS.**# 004 [25 Pa. Code §127.441]****Operating permit terms and conditions.**

Table 6 to Subpart ZZZZ of Part 63— Requirements for Existing Stationary RICE Located at Area Sources of HAP Emissions:

- i. Operating and maintaining the stationary RICE according to the manufacturer's emission-related operation and maintenance instructions; or

**SECTION D. Source Level Requirements**

ii. Develop and follow your own maintenance plan which must provide to the extent practicable for the maintenance and operation of the engine in a manner consistent with good air pollution control practice for minimizing emissions.

VII. ADDITIONAL REQUIREMENTS.

No additional requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

***** Permit Shield in Effect. *****

**SECTION D. Source Level Requirements**

Source ID: 203

Source Name: LANDFILL GAS

Source Capacity/Throughput:

This source occurs in alternate operation CANDLE FLARE

I. RESTRICTIONS.**Emission Restriction(s).****# 001 [25 Pa. Code §127.441]****Operating permit terms and conditions.**

In accordance with Plan Approval PA-56-00181B, Condition #6, the Phase III landfill gas collection system consists of various vertical and horizontal gas extraction wells connected by a manifold system. The landfill gas shall be routed to the candle flare and the Parnell enclosed flare. Total flare capacity shall be sufficient to handle the maximum expected gas flow rate.

002 [25 Pa. Code §127.441]**Operating permit terms and conditions.**

- i) If the heat input of the collected 'rock well' gas is less than 11.55 MMBtu per hour, the company is permitted to combust the gas in the candle flare; and
- ii) If the heat input of the collected 'rock well' gas is greater than or equal to 11.55 MMBtu per hour, the LFG shall be combusted in the Parnell enclosed flare.

003 [25 Pa. Code §127.441]**Operating permit terms and conditions.**

In accordance with Plan Approval PA-56-00181B, Condition #9, the enclosed flare shall maintain a 3-hour average operating temperature no more than 28 degree C below the average combustion temperature as determined during the most recent performance test (based on 3 hour period of operation), which showed compliance with 40 CFR 60.752(b)(2)(iii), and shall be continuously monitored and recorded.

004 [25 Pa. Code §127.441]**Operating permit terms and conditions.**

In accordance with Plan Approval PA-56-00181B, Condition #12, the enclosed flare shall be operated with no visible emissions except for periods not to exceed a total of 5 minutes during any two consecutive hours.

005 [25 Pa. Code §127.441]**Operating permit terms and conditions.**

In accordance with Plan Approval PA-56-00181B, Condition #10, the enclosed flare shall be operated with a flame present at all times, except during times of startup, shutdown, and/or malfunction. The flare shall be equipped with an automatic shutoff mechanism designed to immediately stop the flow of gases when a flameout occurs. During restart or startup, there shall be sufficient flow of auxiliary fuel to the burner such that unburned landfill gases are not emitted to the atmosphere.

006 [25 Pa. Code §127.441]**Operating permit terms and conditions.**

In accordance with Plan Approval PA-56-00181B, Condition # 8, and 40 CFR § 752(b)(2)(iii)(B), the Parnell enclosed flare shall be operated to either reduce NMOC emissions by 98 weight-percent, or reduce the outlet NMOC concentration to less than 20 parts per million by volume, dry basis as hexane at 3 percent oxygen.

007 [25 Pa. Code §127.441]**Operating permit terms and conditions.**

Emissions from the Parnell enclosed flare shall not exceed 0.08 lbs NOx/mmbtu fired and 0.20 lbs CO/mmbtu fired.

008 [25 Pa. Code §127.441]**Operating permit terms and conditions.**

In accordance with Plan Approval PA-56-00181B, Condition #4, the amended design capacity of this facility is established at 23.9 million tons of municipal solid waste. This includes the waste deposited in the existing Phase I and Phase II areas, and the anticipated capacity of the proposed Phase III expansion area. Any increase in the design capacity above this level is subject to permitting by both Air Quality (AQ) and the Bureau of Waste Management (BWM).

SECTION D. Source Level Requirements**# 009 [40 CFR Part 60 Standards of Performance for New Stationary Sources §40 CFR 60.759]
Subpart WWT--Standards of Performance for Municipal Solid Waste Landfills
Specifications for active collection systems.**

(a) Each owner or operator seeking to comply with 60.752(b)(2)(i) shall site active collection wells, horizontal collectors, surface collectors, or other extraction devices at a sufficient density throughout all gas producing areas using the following procedures unless alternative procedures have been approved by the Administrator as provided in 60.752(b)(2)(i)(C) and (D):

(1) The collection devices within the interior and along the perimeter areas shall be certified to achieve comprehensive control of surface gas emissions by a professional engineer. The following issues shall be addressed in the design: depths of refuse, refuse gas generation rates and flow characteristics, cover properties, gas system expandability, leachate and condensate management, accessibility, compatibility with filling operations, integration with closure end use, air intrusion control, corrosion resistance, fill settlement, and resistance to the refuse decomposition heat.

(2) The sufficient density of gas collection devices determined in paragraph (a)(1) of this section shall address landfill gas migration issues and augmentation of the collection system through the use of active or passive systems at the landfill perimeter or exterior.

(3) The placement of gas collection devices determined in paragraph (a)(1) of this section shall control all gas producing areas, except as provided by paragraphs (a)(3)(i) and (a)(3)(ii) of this section.

(i) Any segregated area of asbestos or non-degradable material may be excluded from collection if documented as provided under 60.758(d). The documentation shall provide the nature, date of deposition, location and amount of asbestos or non-degradable material deposited in the area, and shall be provided to the Administrator upon request.

(ii) Any nonproductive area of the landfill may be excluded from control, provided that the total of all excluded areas can be shown to contribute less than 1 percent of the total amount of NMOC emissions from the landfill. The amount, location, and age of the material shall be documented and provided to the Administrator upon request. A separate NMOC emissions estimate shall be made for each section proposed for exclusion, and the sum of all such sections shall be compared to the NMOC emissions estimate for the entire landfill. Emissions from each section shall be computed using the following equation:

$$Q_i = 2 k L_o M_i (e^{-kt_i}) \text{ (CNMOC)} (3.6 \times 10^{-9})$$

where,

Q_i = NMOC emission rate from the i th section, megagrams per year

k = methane generation rate constant, year⁻¹

L_o = methane generation potential, cubic meters per megagram solid waste

M_i = mass of the degradable solid waste in the i th section, megagram

t_i = age of the solid waste in the i th section, years

CNMOC = concentration of non-methane organic compounds, parts per million by volume

3.6×10^{-9} = conversion factor

(iii) The values for k , L_o , and CNMOC determined in field testing shall be used, if field testing has been performed in determining the NMOC emission rate or the radii of influence. If field testing has not been performed, the default values for k , L_o and CNMOC provided in 60.754(a)(1) shall be used. The mass of non-degradable solid waste contained within the given section may be subtracted from the total mass of the section when estimating emissions provided the nature, location, age, and amount of the non-degradable material is documented as provided in paragraph (a)(3)(i) of this section.

**SECTION D. Source Level Requirements**

(b) Each owner or operator seeking to comply with 60.752(b)(2)(i)(A) shall construct the gas collection devices using the following equipment or procedures:

(1) The landfill gas extraction components shall be constructed of polyvinyl chloride (PVC), high density polyethylene (HDPE) pipe, fiberglass, stainless steel, or other nonporous corrosion resistant material of suitable dimensions to: convey projected amounts of gases; withstand installation, static, and settlement forces; and withstand planned overburden or traffic loads. The collection system shall extend as necessary to comply with emission and migration standards. Collection devices such as wells and horizontal collectors shall be perforated to allow gas entry without head loss sufficient to impair performance across the intended extent of control. Perforations shall be situated with regard to the need to prevent excessive air infiltration.

(2) Vertical wells shall be placed so as not to endanger underlying liners and shall address the occurrence of water within the landfill. Holes and trenches constructed for piped wells and horizontal collectors shall be of sufficient cross-section so as to allow for their proper construction and completion including, for example, centering of pipes and placement of gravel backfill. Collection devices shall be designed so as not to allow indirect short circuiting of air into the cover or refuse into the collection system or gas into the air. Any gravel used around pipe perforations should be of a dimension so as not to penetrate or block perforations.

(3) Collection devices may be connected to the collection header pipes below or above the landfill surface. The connector assembly shall include a positive closing throttle valve, any necessary seals and couplings, access couplings and at least one sampling port. The collection devices shall be constructed of PVC, HDPE, fiberglass, stainless steel, or other nonporous material of suitable thickness.

(c) Each owner or operator seeking to comply with 60.752(b)(2)(i)(A) shall convey the landfill gas to a control system in compliance with 60.752(b)(2)(iii) through the collection header pipe(s). The gas mover equipment shall be sized to handle the maximum gas generation flow rate expected over the intended use period of the gas moving equipment using the following procedures:

(1) For existing collection systems, the flow data shall be used to project the maximum flow rate. If no flow data exists, the procedures in paragraph (c)(2) of this section shall be used.

(2) For new collection systems, the maximum flow rate shall be in accordance with 60.755(a)(1).

II. TESTING REQUIREMENTS.**# 010 [25 Pa. Code §127.441]****Operating permit terms and conditions.**

Stack testing shall be conducted at intervals not greater than every five years on the Parnell enclosed flare.

As per PA-56-00181B, Condition#15:

(a) Owner/operator shall test the outlet NO_x, CO, and NMOC emission rates of the Parnell enclosed flare according to the schedule below, to demonstrate compliance with the destruction efficiency and emission limits established herein.

(b) Owner/operator shall record all pertinent operating data during the stack test and include this data with the stack test results. Operating data shall include, but may not be limited to: Parnell enclosed flare and the candle flare operating temperature and flow rate of landfill gas to the flares.

011 [25 Pa. Code §127.441]**Operating permit terms and conditions.**

(a) Pursuant to 25 Pa. Code § 139.3 to at least 45 calendar days prior to commencing an emissions testing program, a test protocol shall be submitted to the Department for review and approval. The test protocol shall meet all applicable

**SECTION D. Source Level Requirements**

requirements specified in the most current version of the Department's Source Testing Manual.

(b) Pursuant to 25 Pa. Code § 139.3 at least 15 calendar days prior to commencing an emission testing program, notification as to the date and time of testing shall be given to the appropriate Regional Office. Notification shall also be sent to the Division of Source Testing and Monitoring. Notification shall not be made without prior receipt of a protocol acceptance letter from the Department.

(c) Pursuant to 25 Pa. Code Section 139.53(a)(3) within 15 calendar days after completion of the on-site testing portion of an emission test program, if a complete test report has not yet been submitted, an electronic mail notification shall be sent to the Department's Division of Source Testing and Monitoring indicating the completion date of the on-site testing.

(d) Pursuant to 40 CFR Part 60.8(a), 40 CFR Part 61.13(f) and 40 CFR Part 63.7(g) a complete test reports shall be submitted to the Department no later than 60 calendar days after completion of the on-site testing portion of an emission test program. For those tests being conducted pursuant to 40 CFR Part 61, the, a complete test report shall be submitted within 31 days after completion of the test.

(e) Pursuant to 25 Pa. Code Section 139.53(b) a complete test report shall include a summary of the emission results on the first page of the report indicating whether each pollutant measured is within permitted limits and a statement of compliance or non-compliance with all applicable permit conditions. The summary results will include, at a minimum, the following information:

1. A statement that the owner or operator has reviewed the report from the emissions testing body and agrees with the findings.
2. Permit number(s) and condition(s) which are the basis for the evaluation.
3. Summary of results with respect to each applicable permit condition.
4. Statement of compliance or non-compliance with each applicable permit condition.

(f) Pursuant to 25 Pa. Code § 139.3 to all submittals shall meet all applicable requirements specified in the most current version of the Department's Source Testing Manual.

(g) All testing shall be performed in accordance with the provisions of Chapter 139 of the Rules and Regulations of the Department of Environmental Protection.

(h) Pursuant to 25 Pa. Code Section 139.53(a)(1) and 139.53(a)(3) all submittals, besides notifications, shall be accomplished through PSIMS*Online available through <https://www.depgreenport.state.pa.us/ecommm/Login.jsp> when it becomes available. If internet submittal cannot be accomplished, one copy of the submittal shall be sent to the Pennsylvania Department of Environmental Protection, Bureau of Air Quality, Division of Source Testing and Monitoring, 400 Market Street, 12th Floor Rachael Carson State Office Building, Harrisburg, PA 17105-8468 with deadlines verified through document postmarks. Two copies of the submittal shall be sent to Pennsylvania Department of Environmental Protection, SWRO-AQ, 400 Waterfront Dr., Pittsburgh, PA 15222.

(i) The permittee shall insure all federal reporting requirements contained in the applicable subpart of 40 CFR are followed, including timelines more stringent than those contained herein. In the event of an inconsistency or any conflicting requirements between state and the federal, the most stringent provision, term, condition, method or rule shall be used by default.

012 [40 CFR Part 60 Standards of Performance for New Stationary Sources §40 CFR 60.34c]
Subpart Cc - Emission Guidelines and Compliance Times for Municipal Solid Waste Landfills
Test methods and procedures

All performance tests shall be conducted in accordance with 40 CFR 60.754.

**SECTION D. Source Level Requirements****III. MONITORING REQUIREMENTS.****# 013 [25 Pa. Code §127.441]****Operating permit terms and conditions.**

In accordance with Plan Approval PA-56-00181B, Condition # 17(a)(i), and in accordance with 40 CFR § 60.756, the Owner/operator shall install, calibrate, maintain and operate a temperature monitoring device to monitor the operating temperature of the enclosed ground flare. Device shall be equipped with a continuous recorder. Device shall have an accuracy of +/-1percent of the temperature being measured, expressed in degrees Celsius or +/- 0.5 oC, whichever is greater.

IV. RECORDKEEPING REQUIREMENTS.**# 014 [25 Pa. Code §127.442]****Reporting requirements.**

In accordance with the applicable recordkeeping requirements of 40 CFR 60.758(relating to recordkeeping requirements).

(a) The owner/operator shall keep on site records of the maximum design capacity, the current amount of solid waste in place, and a year-by-year waste acceptance rate.

(b) The owner/operator shall keep records of:

- all visible emission readings
- heat content determinations to comply with condition #002 of this section
- gas flowrates or bypass flowrates to the control device
- flare flame or temperature monitoring, outages, surface monitoring data
- well pressures, temperatures, and nitrogen or oxygen concentrations
- and any other parameters that are available to indicate that the collection and control device is operating properly.

(c) The owner/operator shall keep records of wells in operation, and wells out of operation (if any) on a daily basis*.

(d) The owner/operator shall keep records of the installation date and location of all newly installed or replaced collection wells, pipe headers, and other collection assemblies.

(e) The owner/operator shall keep documentation of the nature, date of deposition, amount and location of asbestos containing or nondegradable waste excluded from the landfill gas collection system, as well as any non-landfill gas producing areas excluded from the landfill gas collection system.

(f) The owner/operator shall keep records of all monitoring and exceedences of the collection or control systems as defined by 40 CFR 60, Subparts Cc and WWW**.

(g) Records required under this operating permit shall be kept for a minimum period of 5 years and shall be made available to the Department upon request. Offsite records may be maintained by the owner/operator if they are retrievable within 4 hours.

(h) The owner/operator shall keep records of periods of operation during which the parameter boundaries which were established by the most recent performance test are exceeded.

(i) Hours of 12 month rolling operationof each flare.

*The owner/operator shall keep an up-to-date, readily accessible plot map which shows each existing and planned collector in the gas collection system, and provides a unique identifier for each collector.

**The owner/operator shall keep records of all monitoring activities performed to meet the operational requirements of 40 CFR 60.753, including expansion of wellfield, measurement of pressure, temperature, and nitrogen or oxygen concentrations at well head, and surface methane concentration measurements.

**The owner/operator shall keep records of any exceedances detected during the monitoring activities performed to meet

**SECTION D. Source Level Requirements**

the operational requirements of 40 CFR 60.753, and all actions taken to remediate the exceedances.

V. REPORTING REQUIREMENTS.**# 015 [25 Pa. Code §127.442]****Reporting requirements.**

The owner/operator shall comply with all applicable reporting requirements of 40 CFR 60.7 and 40 CFR 60.757, including, but not necessarily limited to:

- (1) In accordance with 40 CFR 60.757(d), owner/operator shall submit a closure report to DEP and EPA within 30 days of waste acceptance cessation.
- (2) In accordance with 40 CFR 60.757(e), owner/operator shall submit an equipment removal report to DEP and EPA 30 days prior to the removal or cessation of operation of the control equipment.
- (3) In accordance with 40 CFR 60.757(f), no later than 180 days after issuance of this operating permit, and annually thereafter, permittee shall submit an annual compliance report which includes all of the following :
 - (a) Value and length of time for exceedance of pressure, temperature, and nitrogen or oxygen concentrations parameters at wellheads.
 - (b) Description and duration of all periods when landfill gas stream is diverted from control devices.
 - (c) Description and duration of all periods when the control device(s) were not operating for any periods which exceeded 1 hour.
 - (d) All periods when the collection system was not operating in excess of 5 days.
 - (e) The location of each exceedance of the 500 parts per million methane concentration as provided in 40 CFR 60.753(d), and the concentration recorded at each location for which an exceedance was recorded in the previous month.
 - (f) The date of the installation and the location of each well or collection system expansion.
- (4) The owner/operator shall comply with the notification requirements found in 40 CFR 60.7, including, but not necessarily limited to, commencement of construction, anticipated start-up date, actual start-up date, any physical or operational change, and performance test dates.

VI. WORK PRACTICE REQUIREMENTS.

No additional work practice requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

VII. ADDITIONAL REQUIREMENTS.**# 016 [25 Pa. Code §127.441]****Operating permit terms and conditions.**

This source is controlled by the Parnell enclosed flare and the candle flare. The specific requirements for the operation of each flare can be found under site level requirements.

017 [25 Pa. Code §127.441]**Operating permit terms and conditions.**

Solid Waste Permit No. 100081, Form 26 (Gas Management), Revised 3/90, and its associated drawings were approved as meeting the requirements of 40 CFR 60.752(b)(2)(i) for Gas Collection and Control Design Plan. The associated drawings are as follows:

**SECTION D. Source Level Requirements**

Drawing No. PAL3-259, Stage A Gas Management Site Plan
Drawing No. PAL3-260, Stage A Extraction Well Header Details
Drawing No. PAL3-262, Stage A Blower Flare Station
Drawing No. PAL3-255, Stage B Gas Management Site Plan
Drawing No. PAL3-256, Stage B Extraction Well Header Details
Drawing No. PAL3-268, Stage B Blower Flare Station

Through Plan Approval No. PA-56-00181B, the Gas Collection and Control System design was modified and supplemented with the following drawings: *

Drawing No. 99-868-E24, Phase III LFG Plan
Drawing No. 99-868-E51, Gas Management System Details (Sheet 1 of 3)
Drawing No. 99-868-E52, Gas Management System Details (Sheet 2 of 3)
Drawing No. 99-868-E66, Gas Management System Details (Sheet 3 of 3)

*Note: These four drawings are not specifically listed in the Plan Approval PA 56-00181B as issued by PADEP but were submitted with the application and reflect the current design for the LFG system.

***** Permit Shield in Effect. *****

**SECTION D. Source Level Requirements**

Source ID: 209

Source Name: LANDFILL FUGITIVE EMISSIONS (PARTICULATE)

Source Capacity/Throughput:

I. RESTRICTIONS.

No additional requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

IV. RECORDKEEPING REQUIREMENTS.

No additional record keeping requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

VI. WORK PRACTICE REQUIREMENTS.

No additional work practice requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

VII. ADDITIONAL REQUIREMENTS.

No additional requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

***** Permit Shield in Effect. *****

**SECTION D. Source Level Requirements**

Source ID: 210

Source Name: GENERATOR #3 (50 HP, NON-EMERGENCY)

Source Capacity/Throughput:


**I. RESTRICTIONS.****Emission Restriction(s).****# 001 [25 Pa. Code §127.441]****Operating permit terms and conditions.**

Table 2d to Subpart ZZZZ of Part 63— Requirements for Existing Stationary RICE Located at Area Sources of HAP Emissions:

- a. Change oil and filter every 1,000 hours of operation or annually, whichever comes first;
- b. Inspect air cleaner every 1,000 hours of operation or annually, whichever comes first;
- c. Inspect all hoses and belts every 500 hours of operation or annually, whichever comes first, and replace as necessary.

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

IV. RECORDKEEPING REQUIREMENTS.**# 002 [25 Pa. Code §127.511]****Monitoring and related recordkeeping and reporting requirements.**

Records of fuel usage shall be kept and maintained on site for five years.

003 [25 Pa. Code §127.511]**Monitoring and related recordkeeping and reporting requirements.**

Records of 12 month rolling hours of operation shall be maintain on site for five years.

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

VI. WORK PRACTICE REQUIREMENTS.**# 004 [25 Pa. Code §127.441]****Operating permit terms and conditions.**

Table 6 to Subpart ZZZZ of Part 63— Requirements for Existing Stationary RICE Located at Area Sources of HAP Emissions:

- i. Operating and maintaining the stationary RICE according to the manufacturer's emission-related operation and maintenance instructions; or
- ii. Develop and follow your own maintenance plan which must provide to the extent practicable for the maintenance and

**SECTION D. Source Level Requirements**

operation of the engine in a manner consistent with good air pollution control practice for minimizing emissions.

005 [25 Pa. Code §127.441]

Operating permit terms and conditions.

Minimize the engine's time spent at idle and minimize the engine's startup time at startup to a period needed for appropriate and safe loading of the engine, not to exceed 30 minutes, after which time the non-startup emission limitations apply.

VII. ADDITIONAL REQUIREMENTS.

No additional requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

***** Permit Shield in Effect. *****



SECTION E. Source Group Restrictions.

SECTION F. Alternative Operation Requirements.

Alternative Operation Name: CANDLE FLARE


#001 CHANGES FROM NORMAL OPERATION

The candle flare may be utilized in place of or in supplement to the primary flare during unusual operating conditions. Unusual operating conditions may include periods of maintenance or malfunction of the primary flare, the gas contains less than 11.55 MMBtu/hour of heat input or periods or flux during which operation of the primary flare must be adjusted to meet changing flow requirements.

Sources included in this Alternative Operation:

ID	Name	Source Type
203	LANDFILL GAS	Process

Alternative Operation Map:

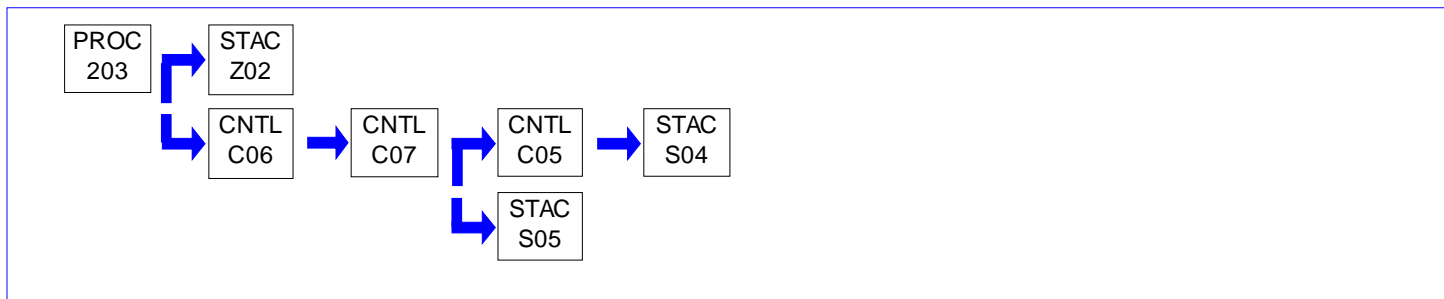

I. RESTRICTIONS.

Emission Restriction(s).

001 [25 Pa. Code §127.441]

Operating permit terms and conditions.

The candle flare may not be used as a permanent substitute for the primary flare. The operation of the candle flare must be conducted in accordance with the manufacturer's recommendations, and with the continuous presence of a flame.

002 [25 Pa. Code §127.441]

Operating permit terms and conditions.

- i) If the heat input of the collected 'rock well' gas is less than 11.55 MMBtu per hour, the company is permitted to combust the gas in the candle flare; and
- ii) If the heat input of the collected 'rock well' gas is greater than or equal to 11.55 MMBtu per hour, the LFG shall be combusted in the Parnell enclosed flare.

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

IV. RECORDKEEPING REQUIREMENTS.

003 [25 Pa. Code §127.511]

Monitoring and related recordkeeping and reporting requirements.

The owner/operator shall record the hours of operation of this flare on a monthly basis. The record shall at a minimum include the date, time, duration, and reason of use.



SECTION F. Alternative Operation Requirements.

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

VI. WORK PRACTICE REQUIREMENTS.

No additional work practice requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

VII. ADDITIONAL REQUIREMENTS.

No additional requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

***** Permit Shield in Effect. *****



SECTION G. Emission Restriction Summary.

Alternative Operation Emission Restriction Summary No emission restrictions listed in this section of the permit.

Source Id	Source Description
-----------	--------------------

**SECTION H. Miscellaneous.**

The following sources are insignificant activities as determined by the Department:

1,000 gallon Diesel Fuel Storage(#110)

Lubricating Oil Storage (Two- 500 gallon tanks)(#112 & #113)

Landfill Used Oil Storage(275 gallon tank)(#109)

Treatment Plant Fuel Oil Furnaces (two @138,000 BTU/hr; Two@ 140,000BTU/hr)

Johnstown Hauling Division(JHD) Fuel Oil Furnaces(Four @ 80,000 BTU/hr)

Maintenance Shop 150,000 BTU Furnace

104 Diesel Oil Tank 10,000 Gallon

106 Hydraulic Tank 400 Gallon

108 Kerosene Tank 400 Gallon

111 JHD Waste Oil Tank 275 Gallon

206 Diesel oil tank 10,000 Gallon



***** End of Report *****
